

Declaration of Performance

According to Annex III of the Regulation (EU) Nr.305/2011
(Construction Products Regulation).

Walraven Throughbolt Anchor WT1

DoP No. 21/0365-WT1

1. Unique identification code of the product-type:

Walraven Throughbolt Anchor WT1, Item numbers: 608408080, 608408095, 608408115, 608410090, 608410115, 608410135, 608412110, 608412120, 608412150, 608416145

2. Intended use/es:

Metal anchors for use in concrete: for fixing and/or supporting to concrete, structural elements (which contributes to the stability of the works) or heavy units.

3. Manufacturer:

J. van Walraven Holding B.V., Industrieweg 5, 3641 RK Mijdrecht, The Netherlands

4. System/s of AVCP:

System 1

5. European Assessment Document: EAD 330232-01-0601 "Mechanical Fasteners for use in concrete ", December 2019.

European Technical Assessment: ETA - 21/0365 (08/02/2024).

Technical Assessment Body: Instituto de Ciencias de la Construcción Eduardo Torroja (IETcc).

Notified body: 1219.

6. Declared performance/s:

Essential Characteristic	Performance	Harmonized Technical Specification
Essential characteristics under static or quasi static loading	See Annex C1, C2, C3, C5, ETA-21/0365	EAD 330232-01-0601
Displacements under tension and shear loads	See Annex C6, ETA-21/0365	EAD 330232-01-0601
Essential characteristics under seismic loading categories C1 and C2	See Annex C7 and C9, ETA-21/0365	EAD 330232-01-0601
Resistance to fire	See Annex C11, ETA-21/0365	EOTA TRO20
Reaction to Fire	Anchors satisfy requirements for Class A1	EN 13501-1

7. Appropriate Technical Documentation and/or Specific Technical Documentation:

N/A

8. The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.


Signed for and on behalf of the manufacturer by:

Frank Nijdam

CCO

J. van Walraven Holding B.V.

Signature

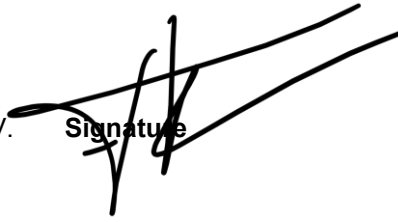A handwritten signature in black ink, consisting of several fluid, overlapping strokes, positioned over the 'Signature' label.

Date 21-10-2025

Place: Mijdrecht

Table C1: Installation parameters for WT1 ST, WT1 SH, WT1 anchors

Installation parameters			Performances					
			M8	M10	M12	M16	M20	M24
d ₀	Nominal diameter of drill bit:	[mm]	8	10	12	16	20	24
d _r	Fixture clearance hole diameter:	[mm]	9	12	14	18	22	26
T _{inst}	Nominal installation torque:	[Nm]	20 / 15 ¹⁾	40	60	100	200	250
L _{min}	Minimum total length of the bolt:	[mm]	68	82	98	119	140	175
h ₁	Depth of drilled hole:	[mm]	60	75	85	105	125	155
h _{nom}	Overall anchor embedment depth in the concrete:	[mm]	55	68	80	97	114	143
h _{ef}	Effective anchorage depth:	[mm]	48	60	70	85	100	125
t _{fix}	Thickness of fixture for washer DIN 125 ≤ 2)	[mm]	L - 66	L - 80	L - 96	L - 117	L - 138	L - 170
t _{fix}	Thickness of fixture for washers DIN 9021, DIN 440 ≤ 2)	[mm]	L - 67	L - 81	L - 97	L - 118	L - 139	L - 171
s _{min}	Minimum allowable spacing: for edge distance c ≥	[mm]	40	40	60	65	95	125
		[mm]	55	70	75	95	105	125
c _{min}	Minimum allowable distance: for spacing s ≥	[mm]	45	45	55	70	95	125
		[mm]	55	90	110	115	105	125
h _{min}	Minimum thickness of concrete member: WT1 ST, WT1 SH	[mm]	100	120	140	170	200	250
h _{min}	Minimum thickness of concrete member: WT1	[mm]	80	90	105	130	150	--

¹⁾ Respective values for anchors WT1 ST / WT1 SH, WT1

²⁾ L = total anchor length,


Table C2: Installation parameters for WT1 SST anchor

Installation parameters			Performances				
			M8	M10	M12	M16	M20
d ₀	Nominal diameter of drill bit:	[mm]	8	10	12	16	20
d _r	Fixture clearance hole diameter:	[mm]	9	12	14	18	22
T _{inst}	Nominal installation torque:	[Nm]	15	30	60	100	200
L _{min}	Minimum total length of the bolt:	[mm]	68	82	98	119	140
h ₁	Depth of drilled hole:	[mm]	60	75	85	105	125
h _{nom}	Overall anchor embedment depth in the concrete:	[mm]	55	68	80	97	114
h _{ef}	Effective anchorage depth:	[mm]	48	60	70	85	100
t _{fix}	Thickness of fixture for washer DIN 125 ≤ 1)	[mm]	L - 66	L - 80	L - 96	L - 117	L - 138
t _{fix}	Thickness of fixture for washers DIN 9021, DIN 440 ≤ 1)	[mm]	L - 67	L - 81	L - 97	L - 118	L - 139
s _{min}	Minimum allowable spacing:	[mm]	42	47	57	75	100
c _{min}	Minimum allowable distance:	[mm]	47	52	62	75	90
h _{min}	Minimum thickness of concrete member:	[mm]	100	120	140	170	200

¹⁾ L = total anchor length

WT1 ST, WT1 SH, WT1, WT1 SST anchor	Annex C1
Performances	
Installation parameters	

Installation process

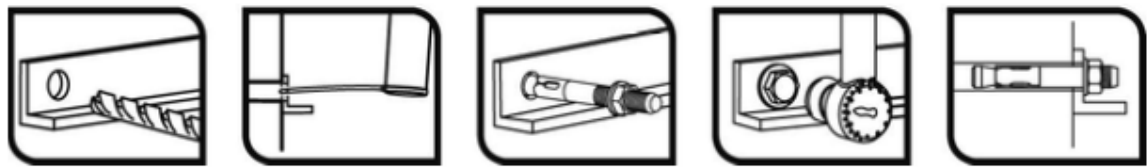

WT1 ST, WT1 SH, WT1, WT1 SST anchors

Performances

Installation procedure

Annex C2

Table C3: Essential characteristics under static or quasi-static tension loads according to design method A according to EN 1992-4 for WT1 ST, WT1 SH, WT1 anchors

Essential characteristics under static or quasi-static tension loads according to design method A			Performances					
			M8	M10	M12	M16	M20	M24
Tension loads: steel failure								
$N_{Rk,s}$	Characteristic resistance:	[kN]	18.1	31.4	40.4	72.7	116.6	179.2
γ_{Ms}	Partial safety factor:	[-]	1.5	1.5	1.5	1.5	1.5	1.5
Tension loads: pull-out failure in concrete								
WT1 ST anchor								
$N_{Rk,p,ucr}$	Characteristic resistance in C20/25 uncracked concrete:	[kN]	9	18	20	36	48	55
$N_{Rk,p,cr}$	Characteristic resistance in C20/25 cracked concrete:	[kN]	5	9.5	12	25	32	35
WT1 SH anchor								
$N_{Rk,p,ucr}$	Characteristic resistance in C20/25 uncracked concrete:	[kN]	10	18	-- ¹⁾	36	-- ¹⁾	--
$N_{Rk,p,cr}$	Characteristic resistance in C20/25 cracked concrete:	[kN]	6	10	16	-- ¹⁾	30	--
WT1 anchor								
$N_{Rk,p,ucr}$	Characteristic resistance in C20/25 uncracked concrete:	[kN]	10	18	28	34	-- ¹⁾	--
$N_{Rk,p,cr}$	Characteristic resistance in C20/25 cracked concrete:	[kN]	7	11	15	-- ¹⁾	-- ¹⁾	--
γ_{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	1.2
ψ_c	Increasing factor for	C30/37	1.22	1.17	1.22	1.22	1.17	1.22
	$N^0_{Rk,p}$:	C40/50	1.41	1.31	1.41	1.41	1.31	1.41
		C50/60	1.58	1.43	1.58	1.58	1.43	1.58
Tension loads: concrete cone and splitting failure								
h_{ef}	Effective embedment depth:	[mm]	48	60	70	85	100	125
$k_{ucr,N}$	Factor for uncracked concrete:	[-]	11.0					
$k_{cr,N}$	Factor for cracked concrete:	[-]	7.7					
γ_{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	1.2
$S_{cr,N}$	Concrete cone failure:	[mm]	3 x h_{ef}					
$C_{cr,N}$		[mm]	1.5 x h_{ef}					
$S_{cr,sp}$	Splitting failure:	[mm]	288	300	350	425/ 510 ¹⁾	500/ 600 ¹⁾	560
$C_{cr,sp}$		[mm]	144	150	175	213/ 255 ¹⁾	250/ 300 ¹⁾	280

¹⁾ Respective values for anchors WT1 ST / WT1 SH, WT1

WT1 ST, WT1 SH, WT1 anchors

Performances

Essential characteristics under static or quasi-static tension loads

Annex C3

Table C5: Essential characteristics under static or quasi-static shear loads of design method A according to EN 1992-4 for WT1 ST, WT1 SH, WT1 anchors

Essential characteristics under static or quasi-static shear loads according to design method A			Performances					
			M8	M10	M12	M16	M20	M24
Shear loads: steel failure without lever arm								
V _{Rk,s}	Characteristic resistance:	[kN]	11.0	17.4	25.3	47.1	73.1	84.7
k ₇	Ductility factor:	[-]	1.00					
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	1.25
Shear loads: steel failure with lever arm								
M ⁰ _{Rk,s}	Characteristic bending moment:	[Nm]	22.5	44.8	78.6	199.8	389.4	673.5
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	1.25
Shear loads: concrete pryout failure								
k ₈	Pryout factor:	[-]	1	2	2	2	2	2
γ _{ins}	Installation safety factor:	[-]	1.00					
Shear loads: concrete edge failure								
ê _t	Effective length of anchor under shear loads:	[mm]	48	60	70	85	100	125
d _{nom}	Outside anchor diameter:	[mm]	8	10	12	16	20	24
γ _{ins}	Installation safety factor:	[-]	1.00					

Table C6 Essential characteristics under static or quasi-static shear loads of design method A according to EN 1992-4 for WT1 SST anchor

Essential characteristics under static or quasi-static shear loads according to design method A			Performances				
			M8	M10	M12	M16	M20
Shear loads: steel failure without lever arm							
V _{Rk,s}	Characteristic resistance:	[kN]	11.9	18.9	27.4	55.0	85.9
k ₇	Ductility factor:	[-]	1.00				
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25
Shear loads: steel failure with lever arm							
M ⁰ _{Rk,s}	Characteristic bending moment:	[Nm]	26.2	52.3	91.7	233.1	454.3
γ _{Ms}	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25
Shear loads: concrete pryout failure							
k ₈	Pryout factor:	[-]	1	2	2	2	2
γ _{ins}	Installation safety factor:	[-]	1.00				
Shear loads: concrete edge failure							
ê _t	Effective length of anchor under shear loads:	[mm]	48	60	70	85	100
d _{nom}	Outside anchor diameter:	[mm]	8	10	12	16	20
γ _{ins}	Installation safety factor:	[-]	1.00				

WT1 ST, WT1 SH, WT1, WT1 SST anchors

Performances

Essential characteristics under static or quasi-static shear loads

Annex C5

Table C7: Displacements under tension loads for WT1 ST, WT1 SH, WT1, WT1 SST anchors

Displacements under tension loads			Performances					
			M8	M10	M12	M16	M20	M24
WT1 ST anchor								
N	Service tension load:	[kN]	2.5	4.3	6.3	10.4	13.9	18.0
δ_{N0}	Short term displacement:	[mm]	1.1	0.7	1.0	0.4	1.6	0.4
$\delta_{N\infty}$	Long term displacement:	[mm]	1.9	1.9	1.9	1.9	1.9	2.0
WT1 SH anchor								
N	Service tension load:	[kN]	2.5	4.3	6.3	10.4	13.9	--
δ_{N0}	Short term displacement:	[mm]	1.0	1.1	0.9	1.5	1.2	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.9	1.9	1.9	1.9	1.9	--
WT1 anchor								
N	Service tension load:	[kN]	2.5	4.3	7.6	11.9	14.3	--
δ_{N0}	Short term displacement:	[mm]	1.0	1.1	0.9	1.5	1.3	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.6	1.6	1.6	1.6	1.6	--
WT1 SST anchor								
N	Service tension load in non cracked concrete:	[kN]	5.7	7.6	8.7	15.3	19.5	--
δ_{N0}	Short term displacement:	[mm]	1.4	1.4	1.4	1.8	1.8	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.9	1.9	1.9	1.9	1.9	--
WT1 SST anchor								
N	Service tension load in cracked concrete:	[kN]	4.0	6.7	7.5	10.7	13.7	--
δ_{N0}	Short term displacement:	[mm]	1.2	1.3	1.3	1.3	1.3	--
$\delta_{N\infty}$	Long term displacement:	[mm]	1.7	1.7	1.7	1.7	1.7	--

Table C8: Displacements under shear load for WT1 ST, WT1 SH, WT1, WT1 SST anchors

Displacements under shear loads			Performances					
			M8	M10	M12	M16	M20	M24
WT1 ST anchor								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	33.6
δ_{V0}	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	1.4
$\delta_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	2.1
WT1 SH anchor								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	-
δ_{V0}	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	--
$\delta_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	--
WT1 anchor								
V	Service shear load:	[kN]	4.9	6.8	8.5	15.1	24.6	--
δ_{V0}	Short term displacement:	[mm]	1.0	1.5	1.8	1.9	3.1	--
$\delta_{V\infty}$	Long term displacement:	[mm]	1.5	2.3	2.7	2.9	4.7	--
WT1 SST anchor								
V	Service shear load:	[kN]	6.8	10.8	15.7	31.4	46.9	--
δ_{V0}	Short term displacement:	[mm]	1.9	1.6	1.6	2.2	2.2	--
$\delta_{V\infty}$	Long term displacement:	[mm]	2.4	2.4	2.4	3.3	3.3	--

WT1 ST, WT1 SH, WT1, WT1 SST anchors
Performances

Displacements under static or quasi-static tension and shear loads

Annex C6

Table C9: Essential characteristics for seismic performance category C1 for WT1 ST, WT1 SH, WT1 anchors

Essential characteristics for seismic performance category C1			Performances					
			M8	M10	M12	M16	M20	M24
Steel tension failure								
$N_{Rk,s,C1}$	Characteristic tension steel failure:	[kN]	18.1	31.4	40.4	72.7	116.6	--
$\gamma_{Ms,N}$	Partial safety factor:	[-]	1.5	1.5	1.5	1.5	1.5	--
Steel shear failure								
WT1 ST anchor								
$V_{Rk,s,C1}$	Characteristic shear steel failure:	[kN]	--	12.2	17.8	33.0	--	--
WT1 SH anchor								
$V_{Rk,s,C1}$	Characteristic shear steel failure:	[kN]	6.6	12.5	18.9	35.4	54.8	--
WT1 anchor								
$V_{Rk,s,C1}$	Characteristic shear steel failure:	[kN]	7.7	12.2	17.8	33.0	58.5	--
α_{gap}	Factor for annular gap:	[-]	0.5					--
$\gamma_{Ms,V}$	Partial safety factor:	[-]	1.25	1.25	1.25	1.25	1.25	--
Pull out failure								
WT1 ST anchor								
$N_{Rk,p,C1}$	Characteristic pull out failure:	[kN]	--	5.3	8.4	17.5	--	--
WT1 SH anchor								
$N_{Rk,p,C1}$	Characteristic pull out failure:	[kN]	6.0	9.0	16.0	25.0	30.0	--
WT1 anchor								
$N_{Rk,p,C1}$	Characteristic pull out failure:	[kN]	5.9	8.9	16.0	25.0	30.0	--
γ_{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	--
Concrete cone failure								
h_{ef}	Effective embedment depth:	[mm]	48	60	70	85	100	--
$s_{cr,N}$	Spacing:	[mm]	3 x h_{ef}					--
$c_{cr,N}$	Edge distance:	[mm]	1.5 x h_{ef}					--
γ_{ins}	Installation safety factor:	[-]	1.2	1.0	1.0	1.0	1.0	--
Concrete pryout failure								
k_s	Pryout factor:	[-]	1	2	2	2	2	--
Concrete edge failure								
l_t	Effective length of anchor:	[mm]	48	60	70	85	100	--
d_{nom}	Outside anchor diameter:	[-]	8	10	12	16	20	--

WT1 ST, WT1 SH, WT1 anchors

Performances

Essential characteristics for seismic performance category C1

Annex C7

Table C11: Essential characteristics for seismic performance category C2 WT1 ST, WT1 SH, WT1 anchors

Essential characteristics for seismic performance category C2			Performances					
			M8	M10	M12	M16	M20	M24
Steel tension and shear failure								
$N_{Rk,s,C2}$	Characteristic tension steel failure:	[kN]	--	31.4	40.4	72.7	116.6	--
$\gamma_{Ms,N}$	Partial safety factor:	[-]	--	1.5	1.5	1.5	1.5	--
$V_{Rk,s,C2}$	Characteristic shear steel failure:	[kN]	--	12.2	17.8	33.0	58.5	--
α_{gap}	Factor for annular gap	[-]	--	0.5	0.5	0.5	0.5	--
$\gamma_{Ms,V}$	Partial safety factor:	[-]	--	1.25	1.25	1.25	1.25	--
Pull out failure								
WT1 ST anchor								
$N_{Rk,p,C2}$	Characteristic pull out failure:	[kN]	--	--	5.2	8.9	--	--
WT1 SH anchor								
$N_{Rk,p,C2}$	Characteristic pull out failure:	[kN]	--	--	5.9	16.3	17.2	--
WT1 anchor								
$N_{Rk,p,C2}$	Characteristic pull out failure:	[kN]	--	3.9	9.1	--	21.0	--
γ_{ins}	Installation safety factor:	[-]	--	1.0	1.0	1.0	1.0	--
Concrete cone failure								
h_{ef}	Effective embedment depth:	[mm]	--	60	70	85	100	--
$s_{cr,N}$	Spacing:	[mm]	--	3 x h_{ef}				--
$c_{cr,N}$	Edge distance:	[mm]	--	1.5 x h_{ef}				--
γ_{ins}	Installation safety factor:	[-]	--	1.0	1.0	1.0	1.0	--
Concrete pryout failure								
k_8	Pryout factor:	[-]	--	2	2	2	2	--
Concrete edge failure								
l_t	Effective length of anchor:	[mm]	--	60	70	85	100	--
d_{nom}	Outside anchor diameter:	[-]	--	10	12	16	20	--
Displacements								
WT1 ST anchor								
$\delta_{N,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	--	2.34	3.99	--	--
$\delta_{V,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	--	5.53	5.96	--	--
$\delta_{N,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	--	9.54	10.17	--	--
$\delta_{V,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	--	9.08	10.66	--	--
WT1 SH anchor								
$\delta_{N,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	--	6.79	5.21	5.72	--
$\delta_{V,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	--	5.53	5.96	6.37	--
$\delta_{N,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	--	24.70	19.58	17.20	--
$\delta_{V,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	--	9.08	10.66	12.32	--
WT1 anchor								
$\delta_{N,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	3.15	5.57	--	6.82	--
$\delta_{V,C2} (DLS)$	Displacement Damage Limitation State: ^{1) 2)}	[mm]	--	5.61	5.53	--	6.37	--
$\delta_{N,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	14.77	20.31	--	29.12	--
$\delta_{V,C2} (ULS)$	Displacement Ultimate Limit State: ¹⁾	[mm]	--	8.68	9.08	--	12.32	--

¹⁾ The listed displacements represent mean values

²⁾ A small displacement may be required in the design in the case of displacements sensitive fastening of "rigid" supports. The characteristics resistance associated with such small displacements may be determined by linear interpolation or proportional reduction.

WT1 ST, WT1 SH, WT1 anchors

Performances

Essential characteristics for seismic performance category C2

Annex C9

Table C13: Essential characteristics under fire exposure WT1 ST, WT1 SH, WT1 anchors anchors

Essential characteristics under fire exposure				Performances					
				M8	M10	M12	M16	M20	M24
Steel failure									
$N_{Rk,s,fi}$	Characteristic tension resistance:	R30	[kN]	0,4	0,9	1,7	3,1	4,9	7,1
		R60	[kN]	0,3	0,8	1,3	2,4	3,7	5,3
		R90	[kN]	0,3	0,6	1,1	2,0	3,2	4,6
		R120	[kN]	0,2	0,5	0,8	1,6	2,5	3,5
$V_{Rk,s,fi}$	Characteristic shear resistance:	R30	[kN]	0,4	0,9	1,7	3,1	4,9	7,1
		R60	[kN]	0,3	0,8	1,3	2,4	3,7	5,3
		R90	[kN]	0,3	0,6	1,1	2,0	3,2	4,5
		R120	[kN]	0,2	0,5	0,8	1,6	2,5	3,5
$M^0_{Rk,s,fi}$	Characteristic bending resistance:	R30	[Nm]	0,4	1,1	2,6	6,7	13,0	22,5
		R60	[Nm]	0,3	1,0	2,0	5,0	9,7	16,8
		R90	[Nm]	0,3	0,7	1,7	4,3	8,4	14,6
		R120	[Nm]	0,2	0,6	1,3	3,3	6,5	11,2
Pull out failure									
$N_{Rk,p,fi}$	Characteristic resistance:	R30							
		R60	[kN]	1,3/1,5 ³⁾	2,3	3,0/4,0 ³⁾	6,3	7,5	7,5
		R90							
		R120	[kN]	1,0/1,2 ³⁾	1,8	2,4/3,2 ³⁾	5,0	6,0	6,0
Concrete cone failure ²⁾									
$N_{Rk,c,fi}$	Characteristic resistance:	R30							
		R60	[kN]	2,9	5,0	7,4	12,0	18,0	31,4
		R90							
		R120	[kN]	2,3	4,0	5,9	9,6	14,4	25,2
$S_{cr,N,fi}$	Critical spacing:	R30 to R120	[mm]	4 x h_{ef}					
$S_{min,fi}$	Minimum spacing:	R30 to R120	[mm]	50	60	70	85/128 ¹⁾	100/150 ¹⁾	125
$C_{cr,N,fi}$	Critical edge distance:	R30 to R120	[mm]	2 x h_{ef}					
$C_{min,fi}$	Minimum edge distance:	R30 to R120	[mm]	$c_{min} = 2 \times h_{ef}$; if fire attack comes from more than one side, the edge distance of the anchor has to be ≥ 300 mm and $\geq 2 \times h_{ef}$					
Concrete pry out failure									
k_8	Pryout factor:	R30 to R120	[-]	1	2	2	2	2	2

¹⁾ Respective values for anchors WT1 ST / WT1 SH, WT1

²⁾ As a rule, splitting failure can be neglected since cracked concrete and reinforcement is assumed.

In absence of other national regulations the partial safety factor for resistance under fire exposure $\gamma_{m,fi} = 1,0$ is recommended

WT1 ST, WT1 SH, WT1 anchors

Performances

Essential characteristics under fire exposure

Annex C11