


## Technical Information Pacifyre® AWM II Conduit Fire Collar

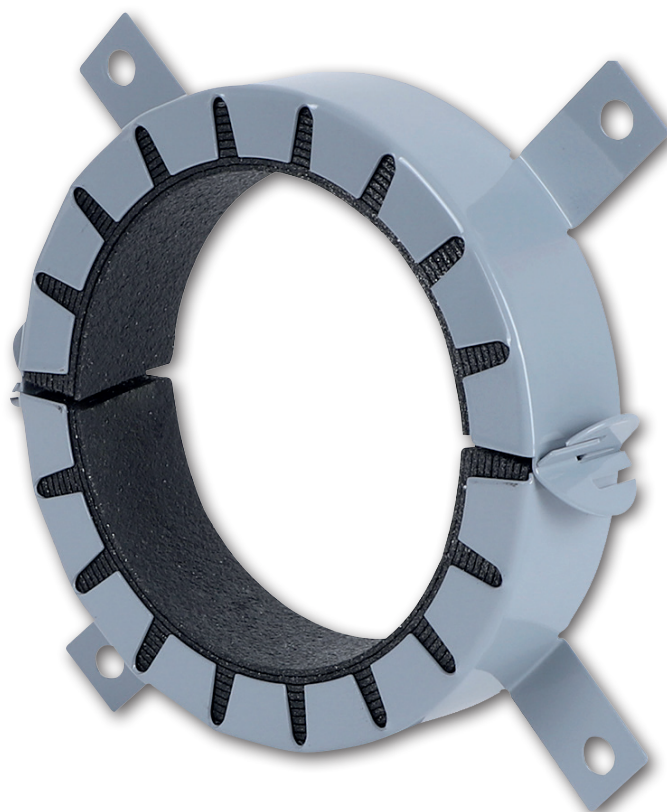

According Annex III of the CPR 305/2011  
No. DoP 501/01/1307 – RK-11/0372

### **Deutschland**

Österreich – Schweiz – South East Europe

### **Walraven GmbH**

Karl-von-Linde-Str. 22

D-95447 Bayreuth

Tel. +49 (0)921 75 60 0

Fax +49 (0)921 75 60 111

info.de@walraven.com

### **Walraven Group**

Mijdrecht (NL) • Tienen (BE) • Bayreuth (DE)

Banbury (GB) • Malmö (SE) • Grenoble (FR)

Barcelona (ES) • Kraków (PL) • Mladá

Boleslav (CZ) • Moscow (RU) • Kyiv (UA)

Detroit (US) • Shanghai (CN) • Dubai (AE)

Budapest (HU)

## **DECLARATION OF PERFORMANCE**

according to Annex III of the Regulation (EU) No. 305/2011

for the construction product ROKU® System AWM II KS

Le/DoP Nr. 501/01/1307

1. Unique identification code of the product-type:

**RK-11/0372**

2. Type, batch or serial number or any other element allowing identification of the construction product as required pursuant to Article 11(4):

**order number: see delivery note**

3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:

**cable sealing**

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11(5):

**Rolf Kuhn GmbH  
Jägersgrund 10  
D-57339 Erndtebrück**

5. If applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2):

**not relevant**

6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:

**system 1**

7. In case of the declaration of performance concerning a construction product covered by a harmonized standard:

**not relevant**

8. In case of the declaration of performance concerning a construction product for which an European Technical Assessment has been issued:

**the notified body MPA Braunschweig, No. 0761, has performed the initial inspection of the factory and of the factory production control and performs the continuous surveillance, assessment and approval of the factory production on a regular basis according System 1 and issued the following:**

**Certificate of Conformity: No. 0761 – CPD – 0222 on basis of the ETA-11/0372**

9. Declared performance

Essential characteristics	Performance	Harmonized technical specification
Fire resistance as a cable sealing for flexible PVC or polyolefine conduits in flexible wall -, rigid wall - or rigid floor constructions by means of the fire protection collar type AWM II with a maximum dimension of 125 mm.	≤ EI 120	ETA-11/0372
Reaction to fire of the intumescent inlay ROKU® Strip	E	
Reaction to fire of the metal band	A1	
Durability and serviceability	use category type X	
Release of dangerous substances	none	
Air permeability	NPD	
Water permeability	NPD	
Mechanical resistance and stability	NPD	
Resistance to impact/movement	NPD	
Adhesion	NPD	
Airborne sound insulation	NPD	
Thermal resistance	NPD	
Water vapor permeability	NPD	
For more details please see ETA-11/0372		

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

p.p. Jürgen Stauffer, chief product and sales manager Kuhn Systems  
( name and function)



Erndtebrück, 01.07.2013  
(place and date of issue)

.....  
(signature)



9. Declared performance

Essential characteristics	Performance	Harmonized technical specification
Fire resistance as a cable sealing for flexible PVC or polyolefine conduits in flexible wall -, rigid wall - or rigid floor constructions by means of the fire protection collar type AWM II with a maximum dimension of 125 mm.	≤ EI 120	ETA-11/0372
Reaction to fire of the intumescent inlay ROKU® Strip	E	
Reaction to fire of the metal band	A1	
Durability and serviceability	use category type X	
Release of dangerous substances	none	
Air permeability	NPD	
Water permeability	NPD	
Mechanical resistance and stability	NPD	
Resistance to impact/movement	NPD	
Adhesion	NPD	
Airborne sound insulation	NPD	
Thermal resistance	NPD	
Water vapor permeability	NPD	
For more details please see ETA-11/0372		

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

p.p. Jürgen Stauffer, chief product and sales manager Kuhn Systems  
( name and function)



Erndtebrück, 01.07.2013  
(place and date of issue)

.....  
(signature)