

New and improved!

Light 2-Screw clamps


For insulated and uninsulated pipes





Small
CHANGES CAN MAKE
A BIG
DIFFERENCE.

2S

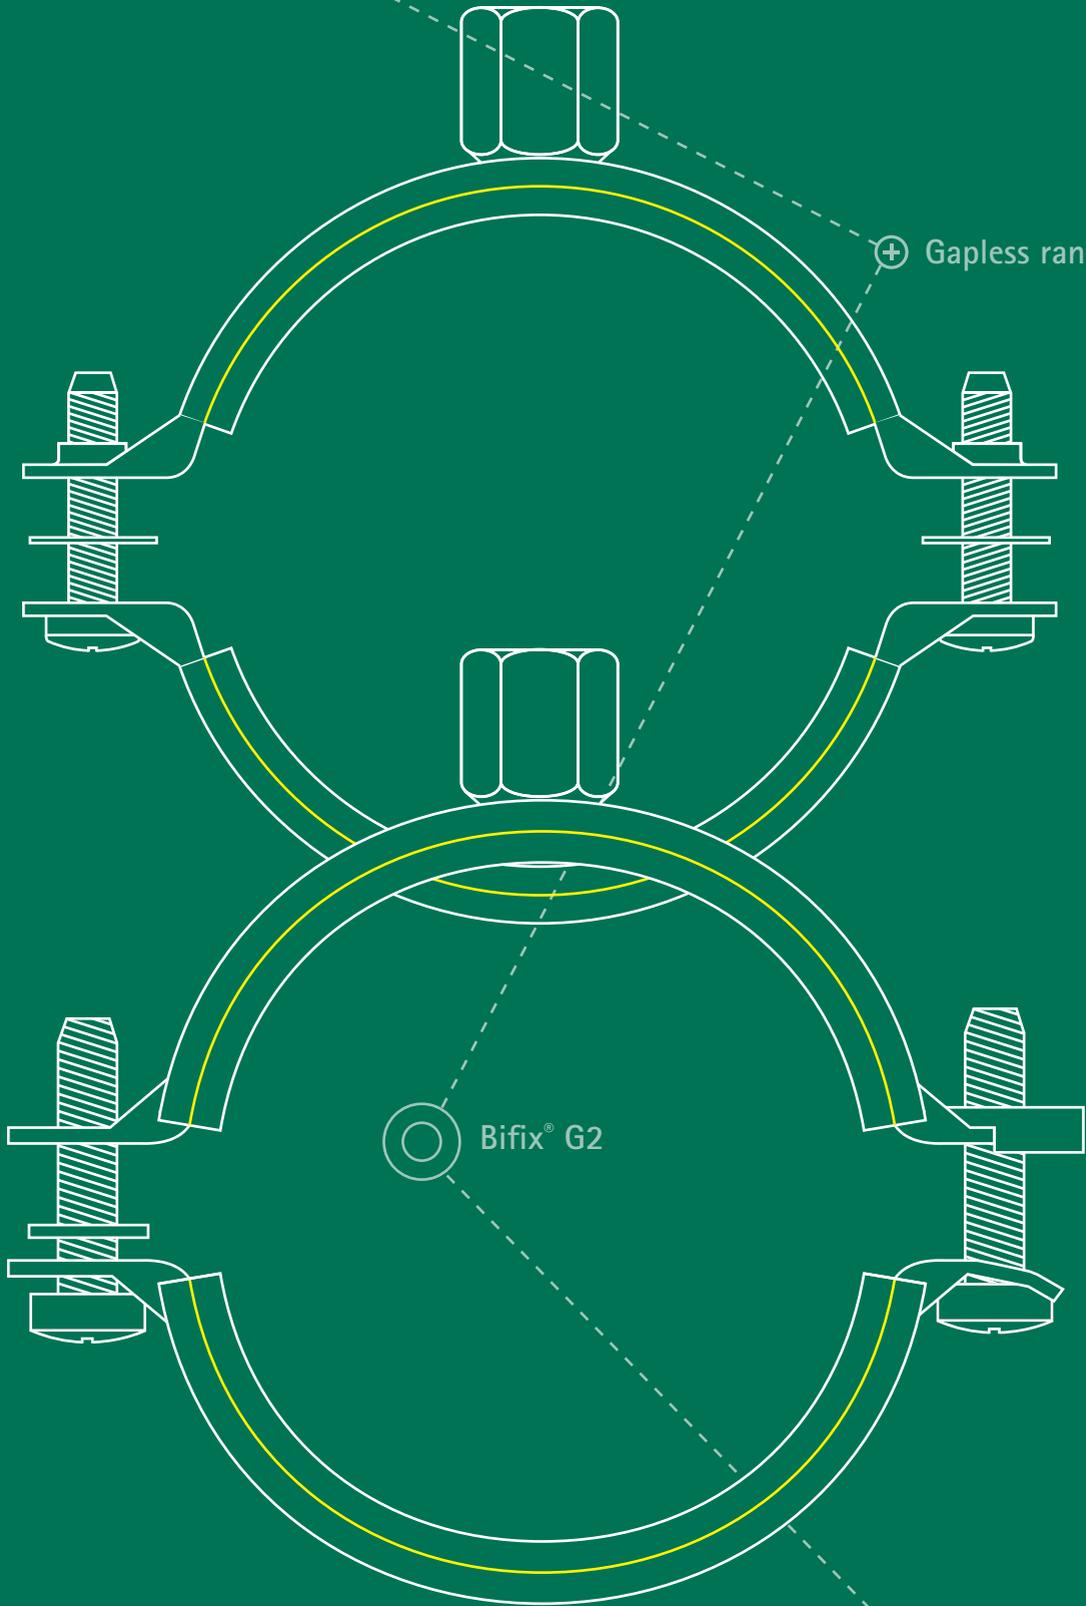

⊕ Gapless range

⊙ Bifix® G2

⊕ For in- and outdoor use

2S clamps

Standard pipe clamps, gapless range

Product information

With the 2S Walraven offers a standard clamp to fix steel, copper and multilayer pipes \varnothing 10 mm up to and including \varnothing 225 mm. The gapless range, available with both rubber lining and without lining, has an optimised steel design and provides a solution for every medium load in accordance to RAL GZ-655.



Features and benefits

- Two-screw clamp
- For insulated and uninsulated pipes
- Gapless range \varnothing 10 - 225 mm
- Material: Steel
- Surface treatment: Zinc plated
- Lining: EPDM
- Standard clamp with optimised steel design
- Screws secured with anti-loss washer
- Good strength vs material usage
- Medium safe load according RAL GZ-655


Type of pipe

- Steel
- Copper
- Plastic (multilayer)



Gapless range

The 2S clamp range covers all diameters from \varnothing 10 - 225 mm, in both the EPDM lined and unlined version.

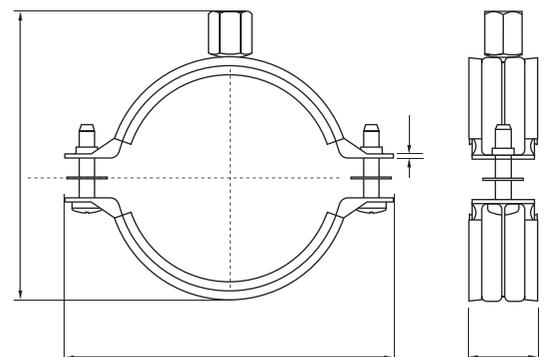

Bifix® G2 clamps

Premium pipe clamps, for in- and outdoor use

Product information

Bifix® G2 offers a unique and premium line of clamps covering all types of pipe fixing solutions, both in- and outdoors. The optimised range consists of both lined and unlined clamps for steel, copper and multilayer pipes, Ø 10 - 225 mm. The new 2 component EPDM lining improves the product's ease of installation as well as the noise reduction properties (DIN 4109). Strength wise the Bifix® G2 holds medium to high loads, in accordance with both RAL GZ-655 and RAL GZ-656 under fire conditions. The Bifix® 5000 G2 is specifically designed for PE pipes and allows either fixing or sliding to handle the pipe expansion.




Features and benefits

- Two-screw clamp
- For insulated and uninsulated pipes
- Optimised range Ø 10 - 225 mm
- Material: Steel
- Surface treatment: BIS UltraProtect® 1000
- Lining: 2 component EPDM
- Improved lining for easy installation
- Quick closing mechanism
- Good strength vs material usage
- Medium-High safe load according RAL GZ-655 and RAL GZ-656
- Noise reduction according DIN 4109


Type of pipe

- Steel
- Copper
- Plastic (all)

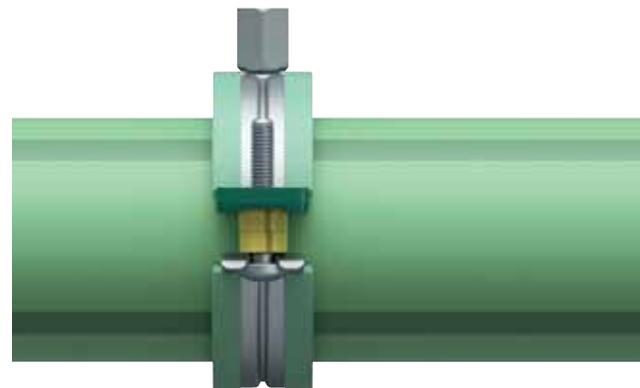

2 component EPDM lining

Allows easy assembly and positioning of pipes. When tightening the screws, the pipe will rest on the soft black lining for increased noise dampening.

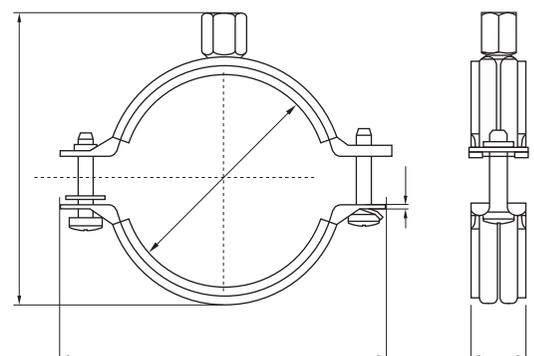

Find out how we can support you

Would you like to find out more about any of the solutions described in this brochure?
Or would you like to discuss how we could help you find the best possible solution for your project? Get in touch today!

United Kingdom Ireland

Walraven Ltd.
18 Wildmere Industrial Estate
Banbury (GB)
Oxon, OX16 3JU
Tel. +44 (0)1295 75 34 00
sales.uk@walraven.com

The Netherlands

Walraven B.V.
P.O. Box 15
3640 AA Mijdrecht (NL)
Tel. +31 (0)297 23 30 00
Fax +31 (0)297 23 30 99
info.nl@walraven.com

Walraven Group

Mijdrecht (NL) · Tienen (BE) · Bayreuth (DE) · Banbury (GB) · Malmö (SE) · Grenoble (FR) · Barcelona (ES) · Kraków (PL)
Mladá Boleslav (CZ) · Moscow (RU) · Kyiv (UA) · Detroit (US) · Shanghai (CN) · Dubai (AE) · Budapest (HU) · Mumbai (IN)
Singapore (SG)

