


Walraven BISOFIX® PIR30

(D0360)

for insulated pipes

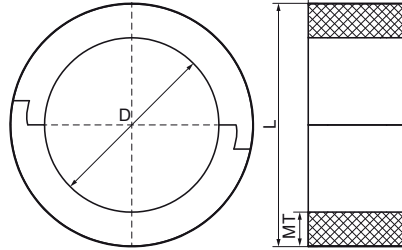

Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- temperature range $-45\text{ °C} - +105\text{ °C}$



Product Number	VVS Number	DN	Total Height	Total Width	Total Length	Material Thickness	Maximum Allowed Load Faz
Reference letter		D	H	W	L	MT	Fo,z
Unit description			mm	mm	mm	mm	N
I30000012			72	72	75	30.00	130
I30000015	018059315		75	75	75	30.00	170
I30000018	018059318	DN 10	78	78	75	30.00	190
I30000020			80	80	75	30.00	220
I30000022	018059322	DN 15	82	82	75	30.00	230
I30000025			85	85	75	30.00	260
I30000028	018059328	DN 20	88	88	75	30.00	300
I30000032			92	92	75	30.00	310
I30000034	018059335		95	95	75	30.00	320
I30000040			100	100	75	30.00	340
I30000042	018059342	DN 32	102	102	75	30.00	350
I30000048	018059348	DN 40	108	108	75	30.00	370
I30000050			110	110	75	30.00	370
I30000054	018059354		114	114	75	30.00	380
I30000057	018059357		117	117	75	30.00	390
I30000060	018059360	DN 50	120	120	75	30.00	410
I30000064	018059364		124	124	75	30.00	420
I30000070	018059370		130	130	75	30.00	440
I30000076	018059376	DN 65	136	136	75	30.00	460
I30000089	018059389	DN 80	149	149	75	30.00	500
I30000102	018059392		162	162	75	30.00	550
I30000108	018059390		168	168	75	30.00	620
I30000114	018059391	DN 100	174	174	100	30.00	1,370
I30000133			193	193	100	30.00	1,520
I30000140		DN 125	200	200	100	30.00	1,570
I30000160			220	220	100	30.00	1,720
I30000168		DN 150	228	228	100	30.00	2,720
I30000219		DN 200	279	279	150	30.00	4,210
I30000273			333	333	150	30.00	5,020
I30000324			384	384	150	30.00	5,790