


Walraven RapidStrut® channel Double (BUP)

(H0409)

double profile for adapting on both sides of the channel

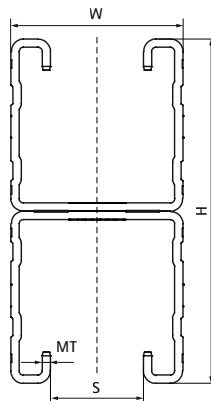

Features & benefits

- universal channel system
- double sided back on back channel with continuous perforation
- inward formed flanges with serrated profile for extra grip
- with sawing marks each 50 mm on both sides
- material: steel 1.0242 (S250GD)
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- version 62|H Double tested for fire safety
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Product Number	VVS Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
Reference letter			H	W	L	MT	S
Unit description			mm	mm	mm	mm	mm
65018626	018050976	21 M - Double	42	41	6,000	2.00	22
65018646	018050986	41 M - Double	82	41	6,000	2.00	22
65018666	018050996	62 H - Double	124	41	6,000	2.50	22
65018466	018050994	62 H - Double	124	41	4,000	2.50	22