


## Walraven RapidStrut® channel Double (pg)

(H0440)

double profile for adapting on both sides of the channel

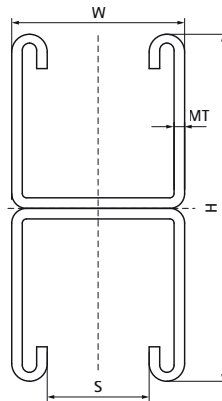

### Features & benefits

- universal channel system
- double sided back on back channel with continuous perforation
- inward formed flanges with serrated profile for extra grip
- with sawing marks each 50 mm on both sides
- material: steel 1.0242 (S250GD)
- pre-galvanized
- version Double 62 tested for fire safety
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Product Number	VVS Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
<i>Reference letter</i>			<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>S</i>
<i>Unit description</i>			<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
65015626	018050906	21   M - Double	42	41	6,000	2.00	22
65015646	018050916	41   M - Double	82	41	6,000	2.00	22
65015666	018050926	62   H - Double	124	41	6,000	2.50	22