


Walraven Pacifyre® AWM III Fire Collar

(U0435)

Standard collar with low collar height for plastic pipes

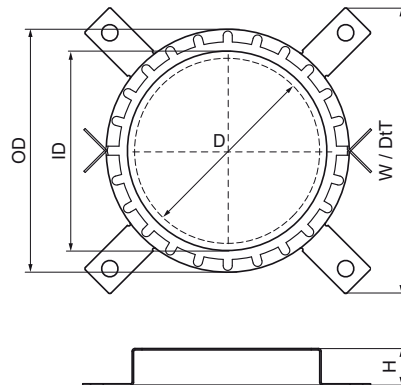

Features & benefits

- Two-part fire collar designed for easy installation
- Zero distance is possible between fire collars
- With a fire resistance up to EI 120 U/C
- Low collar height, allowing building of bends, sockets and T-joints close to the wall or ceiling
- Should be fixed on both sides of the wall / ceiling
- Tested according to EN 1366-3



Product Number	VVS Number	Inner Diameter	Outer Diameter	Total Height	Total Width	Total Depth	Number Of Fixations Needed
Reference letter		ID	OD	H	W	DiT	
Unit description		mm	mm	mm	mm	mm	
2135032034	018067034	38	47	87	26	87	2
2135040042	018067042	46	55	95	26	95	2
2135050052	018067052	56	65	105	26	105	2
2135063065	018067065	69	82	122	26	122	4
2135075077	018067077	81	94	134	26	134	4
2135090092	018067092	86	114	154	26	154	4
2135110112	018067112	116	134	174	26	174	4
2135125125	018067125	132	150	40	150	150	4
2135140140	018067140	144	168	40	168	168	4
2135160160	018067160	164	188	40	188	188	4