


Walraven KSB2 Clamp (M8/M10/1½")

(A05118)

for steel, copper, cast iron and plastic (multilayer) pipe

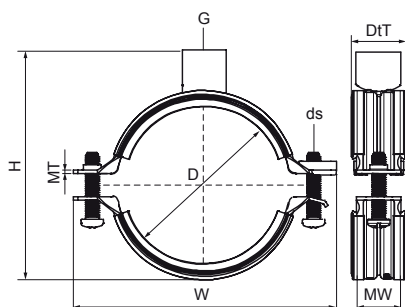

Features & benefits

- two-screw clamp with a triple connection nut
- quick closing mechanism for easy locking of the clamp with one hand
- full range from 10 to 225 mm
- the triple connection nut with M8/M10/G½" internal thread can be converted into a connection nut with M8/M10 internal thread and ½" external thread by unscrewing the sleeve
- material: steel
- zinc plated
- temperature resistance from -30 °C to +120 °C
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 21 dB(A)

EPD

Productnumber	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Thickness	Material Width	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter	D	DN	D	G	H	W	DtT	MT	MW	ds	F _{0,z}	
Unit description	mm		in		mm	mm	mm	mm	mm		N	
33965014	10 - 14	DN 8	-	M8/M10/G½"	57	59	27	1.25	20	M6	400	EPD
33965019	15 - 19	DN 10	¾	M8/M10/G½"	61	63	27	1.25	20	M6	400	EPD
33965023	20 - 23	DN 15	½	M8/M10/G½"	66	68	27	1.25	20	M6	400	EPD
33965028	25 - 28	DN 20	¾	M8/M10/G½"	72	74	27	1.25	20	M6	400	EPD
33965035	31 - 35	DN 25	1	M8/M10/G½"	78	80	27	1.25	20	M6	400	EPD
33965039	36 - 39	-	-	M8/M10/G½"	82	84	27	1.25	20	M6	400	EPD
33965045	40 - 45	DN 32	1¼	M8/M10/G½"	89	91	27	1.25	20	M6	400	EPD
33965052	48 - 52	DN 40	1½	M8/M10/G½"	95	97	27	1.25	20	M6	400	EPD
33965058	54 - 58	-	-	M8/M10/G½"	102	104	27	1.25	20	M6	400	EPD
33965064	60 - 64	DN 50	2	M8/M10/G½"	107	109	27	1.25	20	M6	400	EPD
33965070	66 - 70	-	-	M8/M10/G½"	115	118	27	1.50	20	M6	400	EPD
33965079	75 - 79	DN 65	2½	M8/M10/G½"	122	125	27	1.50	20	M6	700	EPD
33965083	80 - 83	-	-	M8/M10/G½"	121	131	27	1.50	20	M6	700	EPD
33965091	88 - 91	DN 80	3	M8/M10/G½"	137	142	27	2.00	23	M6	700	EPD
33965105	100 - 105	-	-	M8/M10/G½"	151	155	27	2.00	23	M6	1,230	
33965115	108 - 115	DN 100	4	M8/M10/G½"	159	164	27	2.00	23	M6	1,230	EPD
33965130	125 - 130	-	-	M8/M10/G½"	176	181	27	2.00	23	M6	1,230	EPD
33965140	133 - 140	DN 125	5	M8/M10/G½"	187	191	28	2.00	23	M6	1,230	EPD
33965160	152 - 160	-	-	M8/M10/G½"	207	211	28	2.00	23	M6	1,230	EPD
33965169	165 - 169	DN 150	6	M8/M10/G½"	215	225	27	2.50	25	M8	2,390	EPD
33965180	176 - 180	-	-	M8/M10/G½"	228	234	27	2.50	25	M8	2,390	EPD
33965200	192 - 200	-	-	M8/M10/G½"	247	253	27	2.50	25	M8	2,390	EPD
33965210	205 - 210	-	-	M8/M10/G½"	259	265	27	2.50	25	M8	2,390	EPD
33965225	219 - 225	DN 200	8	M8/M10/G½"	273	279	27	2.50	25	M8	2,390	EPD