


Walraven 2S Clamp Set with EPDM Lining (M8/M10)

(A05159)

effortless installation: push into drill hole and twist

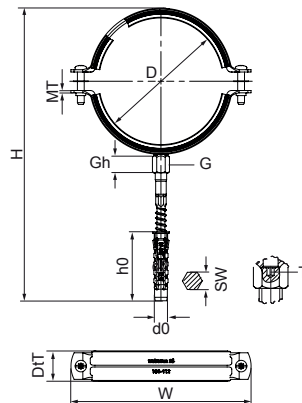

Features & benefits

- two-screw clamp
- gapless range
- anti-loss washers prevent screws from falling out during installation
- material: clamp and hanger bolt made of steel; plug made of PA (polyamide)
- zinc plated

EPD

Productnumber	Outside Pipe Diameter	Connection Thread	Drill Hole Depth	Drill Hole Diameter	Drive Hexagon	Drive Torx	Material Thickness	Total Height	Total Width	Total Depth	Maximum Allowed Load Faz
Reference Letter	D	G	h0	d0	SW	T	MT	H	W	DtT	F _{0,z}
Unit description	mm		mm	mm			mm	mm	mm	mm	N
33245081	75 - 81	M8/M10	50	10	6	25	1.50	203	124	23	850
33245095	88 - 95	M8/M10	50	10	6	25	2.00	221	143	26	1,000
33245112	104 - 112	M8/M10	60	12	8	25	2.00	255	159	26	1,000
33245118	113 - 118	M8/M10	60	12	8	25	2.00	264	168	26	1,000
33245127	119 - 127	M8/M10	60	12	8	25	2.00	274	178	26	1,000
33245137	128 - 137	M8/M10	60	12	8	25	2.00	281	185	26	1,000
33245144	138 - 144	M8/M10	60	12	8	25	2.00	290	194	26	1,000
33245162	154 - 162	M8/M10	60	12	8	25	2.00	307	211	26	1,000
33245172	163 - 172	M8/M10	60	12	8	25	2.50	323	227	28	2,350
33245205	195 - 205	M8/M10	60	12	8	25	2.50	356	260	28	2,350
33245225	217 - 225	M8/M10	60	12	8	25	2.50	374	279	28	2,350