


Walraven Heavy Duty Clamp HD1501 White (1/2") (BUP1000)

(A10091)

for metal pipes

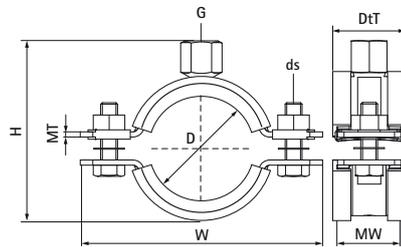

Features & benefits

- two-part clamp with two locking bolts
- up to and including 5": locking nut is captive, hidden in plastic holder
- heavy design
- bolts secured with anti-loss washer
- with CO₂ welded connection nut
- material: steel
- surface protection:
 - white (RAL 9003) epoxy powder coating (60 µm)
 - product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- sound insulating according DIN 4109
- tested for fire safety



| Product Number | DN | Pipe Diameter Imperial | Connection Thread | Total Height | Total Width | Total Depth | Material Width | Material Thickness | Screw Size | Maximum Allowed Load Faz | Approvals |
|------------------|--------|------------------------|-------------------|--------------|-------------|-------------|----------------|--------------------|------------|--------------------------|-------------------------------------|
| Reference letter | D | D | G | H | W | DtT | MW | MT | ds | F _{0,z} | |
| Unit description | " | | | mm | mm | mm | mm | mm | | N | |
| 33179019 | DN 10 | 3/8 | G1/2" | 48 | 82 | 32 | 30 | 2.50 | M8 | 1,500 | CE, ETA, ISO 3822-1, EPD |
| 33179023 | DN 15 | 1/2 | G1/2" | 52 | 85 | 32 | 30 | 2.50 | M8 | 1,500 | CE, ETA, ISO 3822-1, EPD |
| 33179029 | DN 20 | 3/4 | G1/2" | 58 | 91 | 32 | 30 | 2.50 | M8 | 1,500 | CE, ETA, ISO 3822-1, EPD |
| 33179035 | DN 25 | 1 | G1/2" | 65 | 98 | 32 | 30 | 2.50 | M8 | 1,500 | CE, ETA, ISO 3822-1, EPD |
| 33179045 | DN 32 | 1 1/4 | G1/2" | 75 | 109 | 32 | 30 | 2.50 | M8 | 1,500 | CE, ETA, ISO 3822-1, EPD |
| 33179051 | DN 40 | 1 1/2 | G1/2" | 81 | 114 | 32 | 30 | 2.50 | M8 | 1,500 | CE, ETA, ISO 3822-1, EPD |
| 33179059 | DN 50 | | G1/2" | 88 | 121 | 32 | 30 | 2.50 | M8 | 1,500 | CE, ETA, ISO 3822-1, EPD |
| 33179064 | DN 50 | 2 | G1/2" | 94 | 129 | 32 | 30 | 2.50 | M8 | 1,500 | CE, ETA, ISO 3822-1, EPD |
| 33179071 | - | - | G1/2" | 102 | 137 | 36 | 30 | 3.00 | M8 | 2,300 | CE, ETA, ISO 3822-1, EPD |
| 33179078 | DN 65 | 2 1/2 | G1/2" | 109 | 144 | 36 | 30 | 3.00 | M8 | 2,300 | CE, ETA, ISO 3822-1, EPD |
| 33179085 | - | - | G1/2" | 116 | 151 | 36 | 30 | 3.00 | M8 | 2,300 | CE, ETA, ISO 3822-1 |
| 33179092 | DN 80 | 3 | G1/2" | 123 | 158 | 36 | 30 | 3.00 | M8 | 2,300 | CE, ETA, ISO 3822-1, EPD |
| 33179109 | - | - | G1/2" | 140 | 175 | 36 | 30 | 3.00 | M8 | 2,300 | CE, ETA, ISO 3822-1, EPD |
| 33179116 | DN 100 | 4 | G1/2" | 147 | 182 | 36 | 30 | 3.00 | M8 | 2,300 | CE, ETA, ISO 3822-1, EPD |
| 33179133 | - | - | G1/2" | 164 | 199 | 32 | 30 | 3.00 | M8 | 2,300 | CE, ETA, ISO 3822-1, EPD |
| 33179140 | DN 125 | 5 | G1/2" | 171 | 206 | 32 | 30 | 3.00 | M8 | 2,300 | CE, ETA, ISO 3822-1, EPD |
| 33179169 | DN 150 | 6 | G1/2" | 209 | 255 | 45 | 38 | 4.00 | M10 | 3,800 | ITB (KOT), CE, ETA, ISO 3822-1, EPD |
| 33179227 | DN 200 | 8 | G1/2" | 267 | 322 | 45 | 38 | 4.00 | M10 | 3,800 | ITB (KOT), CE, ETA, ISO 3822-1, EPD |