
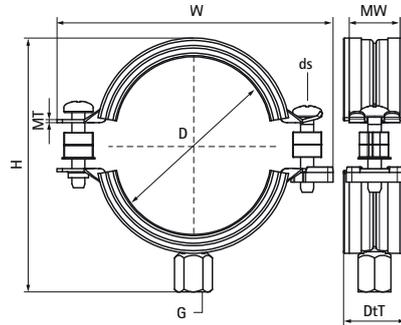


Walraven Bifix® 5000 G2 (BUP1000) (M8/M10)

(A2509)

for plastic pipes

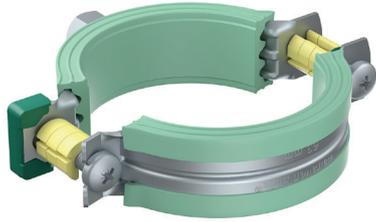

Features & benefits

- two-screw clamp
- with quick locking system
- with removable spacer washers, making the clamp suitable for either sliding or anchoring
- material: steel
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- sound insulating lining according DIN 4109

EPD

Product Number	Connection Thread	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screw Size	Maximum Allowed Load Faz	Approvals
Reference letter	G	H	W	DtT	MW	MT	ds	F _{0,z}	
Unit description		mm	mm	mm	mm	mm		N	
3188016	M8/M10	56	63	25	20	1.25	M6	600	EPD
3188020	M8/M10	61	68	25	20	1.25	M6	600	EPD
3188025	M8/M10	67	74	25	20	1.25	M6	600	EPD
3188032	M8/M10	76	84	25	20	1.25	M6	600	EPD
3188040	M8/M10	81	91	25	20	1.25	M6	600	EPD
3188050	M8/M10	94	97	25	20	1.25	M6	600	EPD
3188056	M8/M10	99	104	25	20	1.25	M6	600	EPD
3188063	M8/M10	106	109	25	20	1.25	M6	600	EPD
3188075	M8/M10	118	125	25	20	1.50	M6	600	EPD
3188090	M8/M10	135	142	28	23	2.00	M6	1,400	EPD
3188110	M8/M10	153	164	28	23	2.00	M6	1,400	EPD
3188125	M8/M10	159	181	28	23	2.00	M6	1,400	EPD
3188135	M8/M10	179	191	28	23	2.00	M6	1,400	EPD
3188160	M8/M10	210	225	30	25	2.50	M8	1,700	EPD
3188058	M8/M10	106	109	25	20	1.25	M6	600	EPD
3188078	M8/M10	120	131	25	20	1.50	M6	600	EPD
3188200	M10	246	269	30	25	2.50	M8	1,700	EPD