


Walraven 2S Clamp Set

(B0533)

effortless installation: push into drill hole and twist

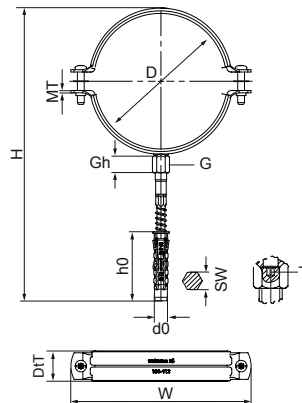

Features & benefits

- two-screw clamp
- gapless range
- anti-loss washers prevent screws from falling out during installation
- material: clamp and hanger bolt made of steel; plug made of PA (polyamide)
- zinc plated
- ≤DN80 Double thread screw M8x80; plug ø10x50
- >DN80 Double thread screw M10x80; plug ø12x60

EPD

Productnumber	Outside Pipe Diameter	Connection Thread	Drill Hole Depth	Drill Hole Diameter	Drive Hexagon	Drive Torx	Material Thickness	Total Height	Total Width	Total Depth	Maximum Allowed Load Faz
Reference Letter	D	G	h0	d0	SW	T	MT	H	W	DtT	F _{0,z}
Unit description	mm		mm	mm			mm	mm	mm	mm	N
33215081	75 - 81	M8/M10	50	10	6	25	1.50	197	118	20	1,400
33215112	104 - 112	M8/M10	60	12	6	25	2.00	249	153	23	2,000
33215019	15 - 19	M8	50	10	6	25	1.00	134	51	20	700
33215024	20 - 24	M8	50	10	6	25	1.00	139	56	20	700
33215030	25 - 30	M8	50	10	6	25	1.00	145	62	20	700
33215037	31 - 37	M8	50	10	6	25	1.00	152	69	20	700
33215046	38 - 46	M8	50	10	6	25	1.25	161	77	20	850
33215052	47 - 52	M8	50	10	6	25	1.25	167	84	20	850
33215061	53 - 61	M8	50	10	6	25	1.25	176	93	20	850
33215067	62 - 67	M8	50	10	6	25	1.25	182	99	20	850
33215095	88 - 95	M8/M10	50	10	6	25	2.00	213	136	23	2,000
33215118	113 - 118	M8/M10	60	12	6	25	2.00	255	159	23	2,000