


## Walraven 2S Clamp Set

(B0533)

effortless installation: push into drill hole and twist

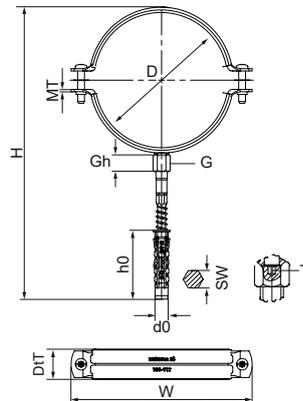

### Features & benefits

- two-screw clamp
- gapless range
- anti-loss washers prevent screws from falling out during installation
- material: clamp and hanger bolt made of steel; plug made of PA (polyamide)
- zinc plated
- ≤DN80 Double thread screw M8x80; plug ø10x50
- >DN80 Double thread screw M10x80; plug ø12x60

## EPD

Product Number	Connection Thread	Drill Hole Depth	Drill Hole Diameter	Drive Hexagon	Drive Torx	Material Thickness	Total Height	Total Width	Total Depth	Maximum Allowed Load Faz
Reference letter	G	h0	d0	SW	T	MT	H	W	DtT	Fa,z
Unit description		mm	mm			mm	mm	mm	mm	N
33215019	M8	50	10	6	25	1.00	134	51	20	700
33215024	M8	50	10	6	25	1.00	139	56	20	700
33215030	M8	50	10	6	25	1.00	145	62	20	700
33215037	M8	50	10	6	25	1.00	152	69	20	700
33215046	M8	50	10	6	25	1.25	161	77	20	850
33215052	M8	50	10	6	25	1.25	167	84	20	850
33215061	M8	50	10	6	25	1.25	176	93	20	850
33215067	M8	50	10	6	25	1.25	182	99	20	850
33215081	M8/M10	50	10	6	25	1.50	197	118	20	1,400
33215095	M8/M10	50	10	6	25	2.00	213	136	23	2,000
33215112	M8/M10	60	12	6	25	2.00	249	153	23	2,000
33215118	M8/M10	60	12	6	25	2.00	255	159	23	2,000