


Walraven Heavy Duty Clamp HD500 (M8/10) (BUP1000)

(B1004)

for steel pipes

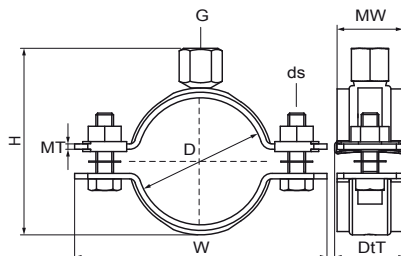

Features & benefits

- two-part clamp with two locking bolts
- heavy design
- bolts secured with anti-loss washer
- with CO₂ welded connection nut
- material: steel
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- also available: noise insulating lining of silicone rubber (reddish brown), heat resistant up to +200 °C (A 35 15)
- tested for fire safety



Productnumber	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Thickness	Material Width	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter	D	DN	D	G	H	W	DtT	MT	MW	ds	Fa,z	
Unit description	mm		in		mm	mm	mm	mm	mm		N	
33038019	15 - 19	DN 10	3/8	M8/M10	46	75	32	2.50	30	M8	2,100	RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038023	19 - 23	DN 15	1/2	M8/M10	50	79	32	2.50	30	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038030	25 - 30	DN 20	3/4	M8/M10	57	85	32	2.50	30	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038036	31 - 36	DN 25	1	M8/M10	63	91	32	2.50	30	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038042	37 - 42			M8/M10	69	98	32	2.50	30	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038045	40 - 45	DN 32	1 1/4	M8/M10	72	102	32	2.50	30	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038052	47 - 52	DN 40	1 1/2	M8/M10	79	109	32	2.50	30	M8	2,100	VdS, RAL-GZ 656, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038058	53 - 58			M8/M10	85	114	32	2.50	30	M8	2,100	RAL-GZ 656, VdS, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038065	59 - 65	DN 50	2	M8/M10	92	121	32	2.50	30	M8	2,100	RAL-GZ 656, VdS, ITB (KOT), CE, ETA, RAL-GZ 655/B, EPD
33038071	66 - 71			M8/M10	98	129	32	2.50	30	M8	2,100	RAL-GZ 655/B, RAL-GZ 656, ITB (KOT), CE, ETA, EPD