


Walraven Heavy Duty Clamp HD500 (M10/12) (BUP1000)

(B1005)

for steel pipes

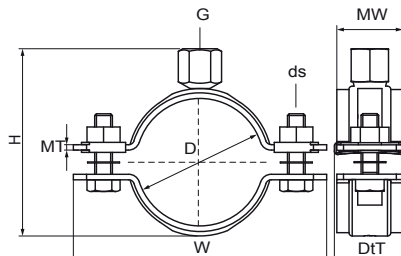

Features & benefits

- two-part clamp with two locking bolts
- heavy design
- bolts secured with anti-loss washer
- with CO₂ welded connection nut
- material: steel
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- also available: noise insulating lining of silicone rubber (reddish brown), heat resistant up to +200 °C (A 35 15)
- tested for fire safety



Productnumber	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Thickness	Material Width	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter	D	DN	D	G	H	W	DtT	MT	MW	ds	Fa,z	
Unit description	mm		in		mm	mm	mm	mm	mm		N	
33048078	72 - 78	DN 65	2½	M10/M12	115	137	32	3.00	30	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), FM, EPD
33048085	79 - 85			M10/M12	122	144	32	3.00	30	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), EPD
33048092	86 - 92	DN 80	3	M10/M12	129	151	32	3.00	30	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), FM, EPD
33048106	98 - 106			M10/M12	143	165	32	3.00	30	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), EPD
33048116	108 - 116	DN 100	4	M10/M12	153	175	32	3.00	30	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), EPD
33048123	116 - 123			M10/M12	160	182	32	3.00	30	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, ITB (KOT), EPD
33048133	125 - 133			M10/M12	170	192	32	3.00	30	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, ITB (KOT), EPD
33048140	132 - 140	DN 125	5	M10/M12	177	199	32	3.00	30	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, VdS, ITB (KOT), EPD
33048154	148 - 154			M10/M12	191	213	32	3.00	30	M8	4,000	CE, ETA, RAL-GZ 655/B, RAL-GZ 656, ITB (KOT), EPD
33048169	159 - 169	DN 150	6	M10/M12	206	240	38	4.00	38	M10	8,200	CE, ETA, VdS, RAL-GZ 656, ITB (KOT), EPD
33048183	173 - 183			M10/M12	220	255	38	4.00	38	M10	8,200	CE, ETA, RAL-GZ 656, ITB (KOT), EPD
33048202	192 - 202			M10/M12	239	274	38	4.00	38	M10	8,200	CE, ETA, RAL-GZ 656, ITB (KOT), EPD
33048219	208 - 219			M10/M12	256	291	38	4.00	38	M10	8,200	CE, ETA, RAL-GZ 656, ITB (KOT), EPD
33048227	217 - 227	DN 200	8	M10/M12	264	299	38	4.00	38	M10	8,200	CE, ETA, RAL-GZ 656, ITB (KOT), EPD