


Walraven Heavy Duty Clamp HD500 (1") (BUP1000)

(B1019)

for steel pipes

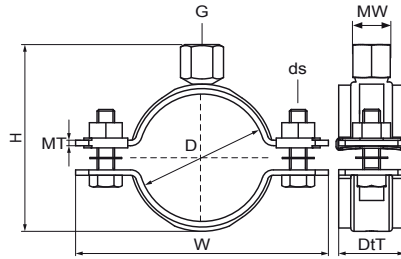

Features & benefits

- two-part clamp with two locking bolts
- heavy design
- bolts secured with anti-loss washer
- with CO₂ welded connection nut
- material: steel
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- also available: noise insulating lining of silicone rubber (reddish brown), heat resistant up to +200 °C (A 35 15)



Productnumber	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Thickness	Material Width	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter	D	DN	D	G	H	W	DtT	MT	MW	ds	F _{0,2}	
Unit description	mm		in		mm	mm	mm	mm	mm		N	
33088169	159 - 169	-	6	G1"	199	240	38	4.00	38	M10	8,200	ITB (KOT), EPD
33088183	173 - 183	-	-	G1"	213	255	38	4.00	38	M10	8,200	ITB (KOT), EPD
33088202	192 - 202	-	-	G1"	232	274	38	4.00	38	M10	8,200	ITB (KOT), EPD
33088227	217 - 227	DN 200	8	G1"	257	299	38	4.00	38	M10	8,200	ITB (KOT), EPD
33088254	244 - 254	-	-	G1"	284	335	38	4.00	38	M12	8,200	ITB (KOT), EPD
33088289	279 - 289	-	-	G1"	319	368	48	5.00	48	M12	12,000	ITB (KOT)
33088325	315 - 325	DN 300	12	G1"	355	404	48	5.00	48	M12	12,000	ITB (KOT), EPD
33088360	350 - 360	DN 350	14	G1"	390	439	48	5.00	48	M12	12,000	ITB (KOT), EPD
33088408	398 - 408	DN 400	16	G1"	438	487	48	5.00	48	M12	12,000	ITB (KOT), EPD
33088458	448 - 458	DN 450	18	G1"	488	538	48	5.00	48	M12	12,000	ITB (KOT), EPD
33088509	499 - 509	DN 500	20	G1"	539	589	48	5.00	48	M12	12,000	ITB (KOT), EPD
33088564	554 - 564	-	-	G1"	594	644	48	5.00	48	M12	12,000	ITB (KOT), EPD