


Walraven Heavy Duty Clamp HD500 (M8/10) (Black)

(B1040)

for steel and stainless steel pipes, including fire mains

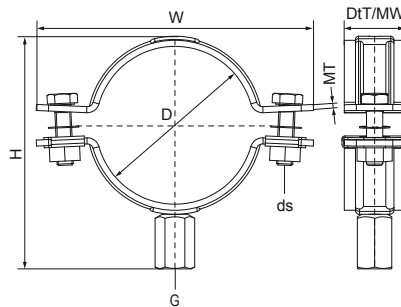

Features & benefits

- two-part clamp with two locking bolts
- up to and including 5": locking nut is captive, hidden in plastic holder
- heavy design
- bolts secured with anti-loss washers
- with 360° CO₂ welded connection nut
- suitable for fire mains (DIN1988-600)
- with M8/10 connection for higher flexibility
- can be used with stainless steel pipe; the epoxy powder coating prevents contact corrosion between clamp and pipe
- material: steel
- surface protection:
- black (RAL 9005) epoxy powder coating (60 µm)
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Productnumber	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Thickness	Material Width	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter	D	DN	D	G	H	W	DtT	MT	MW	ds	Fa,z	
Unit description	mm		in		mm	mm	mm	mm	mm		N	
3303B016	12 - 16	-	-	M8/M10	43	72	32	2.50	30	M8	2,100	ITB (KOT), EPD
3303B026	22 - 26	-	-	M8/M10	53	82	32	2.50	30	M8	2,100	ITB (KOT), EPD
3303B030	25 - 30	DN 20	3/4	M8/M10	57	85	32	2.50	30	M8	2,100	VdS, ITB (KOT), EPD
3303B036	31 - 36	DN 25	1	M8/M10	63	91	32	2.50	30	M8	2,100	VdS, ITB (KOT), EPD
3303B042	37 - 42	-	-	M8/M10	69	98	32	2.50	30	M8	2,100	VdS, ITB (KOT), EPD
3303B052	47 - 52	DN 40	1 1/2	M8/M10	79	109	32	2.50	30	M8	2,100	VdS, ITB (KOT), EPD
3303B065	59 - 65	DN 50	2	M8/M10	92	121	32	2.50	30	M8	2,100	VdS, ITB (KOT), EPD
3303B023	19 - 23	DN 15	1/2	M8/M10	50	79	32	2.50	30	M8	2,100	ITB (KOT)
3303B058	53 - 58	-	-	M8/M10	85	114	32	2.50	30	M8	2,100	VdS, ITB (KOT)