


## Walraven Heavy Duty Clamp HD500 (M10/12) (Black)

(B1041)

for steel and stainless steel pipes, including fire mains

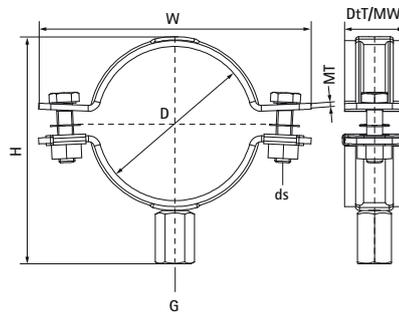

### Features & benefits

- two-part clamp with two locking bolts
- up to and including 5": locking nut is captive, hidden in plastic holder
- heavy design
- bolts secured with anti-loss washers
- with 360° CO<sub>2</sub> welded connection nut
- suitable for fire mains (DIN1988-600)
- with M10/12 connection for higher flexibility
- can be used with stainless steel pipe; the epoxy powder coating prevents contact corrosion between clamp and pipe
- material: steel
- surface protection:
  - black (RAL 9005) epoxy powder coating (60 µm)
  - product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- tested for fire safet



| Product Number   | DN     | Pipe Diameter Imperial | Connection Thread | Total Height | Total Width | Total Depth | Material Width | Material Thickness | Screw Size | Maximum Allowed Load Faz | Approvals           |
|------------------|--------|------------------------|-------------------|--------------|-------------|-------------|----------------|--------------------|------------|--------------------------|---------------------|
| Reference letter | D      | D                      | G                 | H            | W           | DiT         | MW             | MT                 | ds         | Fa,z                     |                     |
| Unit description |        |                        | mm                |              | mm          | mm          | mm             | mm                 | N          |                          |                     |
| 3304B078         | DN 65  | 2½                     | M10/M12           | 115          | 137         | 32          | 30             | 3.00               | M8         | 4,000                    | VdS, ITB (KOT)      |
| 3304B092         | DN 80  | 3                      | M10/M12           | 129          | 151         | 32          | 30             | 3.00               | M8         | 4,000                    | VdS, ITB (KOT), EPD |
| 3304B116         | DN 100 | 4                      | M10/M12           | 153          | 175         | 32          | 30             | 3.00               | M8         | 4,000                    | VdS, ITB (KOT)      |