


Walraven Sprinkler Clamp HD500 (BUP1000)

(B1205)

for sprinkler pipes

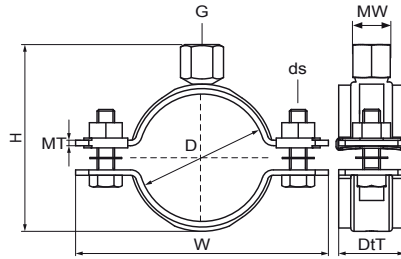

Features & benefits

- two-part clamp with two locking bolts
- heavy design
- bolts secured with anti-loss washer
- with CO₂ welded connection nut
- material: steel
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- with VdS approval - certificate number G 4060019



Productnumber	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Total Height	Total Width	Total Depth	Material Thickness	Material Width	Screw Size	Maximum Allowed Load Faz	Approvals
Reference Letter	D	DN	D	G	H	W	DtT	MT	MW	ds	F _{0,z}	
Unit description	mm		in		mm	mm	mm	mm	mm		N	
4503027	25 - 30	DN 20	¾	M8/M10	57	85	32	2.50	30	M8	2,700	VdS, ITB (KOT), EPD
4503033	31 - 36	DN 25	1	M8/M10	63	91	32	2.50	30	M8	2,700	VdS, ITB (KOT), EPD
4503042	40 - 45	DN 32	1¼	M8/M10	71	102	32	2.50	30	M8	2,700	VdS, ITB (KOT), EPD
4503048	47 - 52	DN 40	1½	M8/M10	78	109	32	2.50	30	M8	2,700	VdS, ITB (KOT), EPD
4503060	59 - 65	DN 50	2	M8/M10	90	121	32	2.50	30	M8	2,700	VdS, ITB (KOT), EPD
4503076	72 - 78	DN 65	2½	M10	112	137	32	3.00	30	M8	5,000	VdS, ITB (KOT), EPD
4503114	108 - 116	DN 100	4	M10	151	175	32	3.00	30	M8	5,000	VdS, ITB (KOT), EPD
4503168	159 - 169	DN 150	6	M12	192	241	38	4.00	38	M10	5,800	VdS, ITB (KOT), EPD
4503219	208 - 219	DN 200	8	M16	249	291	38	4.00	38	M10	5,800	VdS, ITB (KOT), EPD