


Walraven Hose Clamp

(B3045)

for clamping hoses

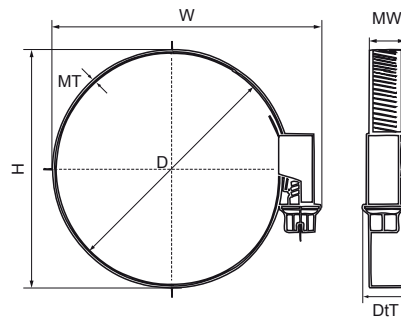

Features & benefits

- high tensile strength
- maximum secured against torque overload
- optimal hose protection
- compliant with the EU-guidelines 2000/53/EG (regarding chrome 6)
- material: steel
- zinc plated
- screw and worm housing zinc plated, blue passivated

Productnumber	Outside Pipe Diameter	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screwing System
Reference Letter	D	H	W	DtT	MW	MT	
Unit description	mm	mm	mm	mm	mm	mm	
0680016	10 - 16	20	37	11.3	9	0.70	External hexagon with slot & phillips
0680020	12 - 20	24	42	11.3	9	0.70	External hexagon with slot & phillips
0680025	16 - 25	30	50	11.3	9	0.70	External hexagon with slot & phillips
0680032	20 - 32	34	55	11.3	9	0.70	External hexagon with slot & phillips
0680040	25 - 40	43	70	11.3	9	0.70	External hexagon with slot & phillips
0680050	35 - 50	53	80	11.3	9	0.70	External hexagon with slot & phillips
0680160	140 - 160	165	171	14.6	12	0.70	External hexagon with slot & phillips
0680060	40 - 60	60	90	11.3	9	0.70	External hexagon with slot & phillips
0680090	70 - 90	95	120	11.3	9	0.70	External hexagon with slot & phillips
0680110	90 - 110	117	140	11.3	9	0.70	External hexagon with slot & phillips
0680120	100 - 120	125	150	11.3	9	0.70	External hexagon with slot & phillips
0680130	110 - 130	135	160	11.3	9	0.70	External hexagon with slot & phillips