


Walraven Hose Clamp

(B3045)

for clamping hoses

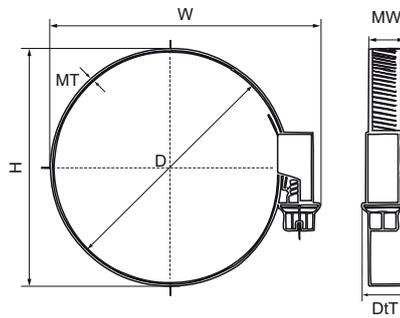

Features & benefits

- high tensile strength
- maximum secured against torque overload
- optimal hose protection
- compliant with the EU-guidelines 2000/53/EG (regarding chrome 6)
- material: steel
- zinc plated
- screw and worm housing zinc plated, blue passivated

Product Number	Total Height	Total Width	Total Depth	Material Width	Material Thickness	Screwing System
Reference letter	H	W	DtT	MW	MT	
Unit description	mm	mm	mm	mm	mm	
0680016	20	37	11.3	9	0.70	External hexagon with slot & phillips
0680020	24	42	11.3	9	0.70	External hexagon with slot & phillips
0680025	30	50	11.3	9	0.70	External hexagon with slot & phillips
0680032	34	55	11.3	9	0.70	External hexagon with slot & phillips
0680040	43	70	11.3	9	0.70	External hexagon with slot & phillips
0680050	53	80	11.3	9	0.70	External hexagon with slot & phillips
0680060	60	90	11.3	9	0.70	External hexagon with slot & phillips
0680080	80	110	11.3	9	0.70	External hexagon with slot & phillips
0680090	95	120	11.3	9	0.70	External hexagon with slot & phillips
0680110	117	140	11.3	9	0.70	External hexagon with slot & phillips
0680120	125	150	11.3	9	0.70	External hexagon with slot & phillips
0680130	135	160	11.3	9	0.70	External hexagon with slot & phillips
0680160	165	171	14.6	12	0.70	External hexagon with slot & phillips