


## Walraven starQuick® Clamp (Grey) - Ø 71 - 115 mm

(C0507)

for securing conduits and pipes to walls, floors, or ceilings

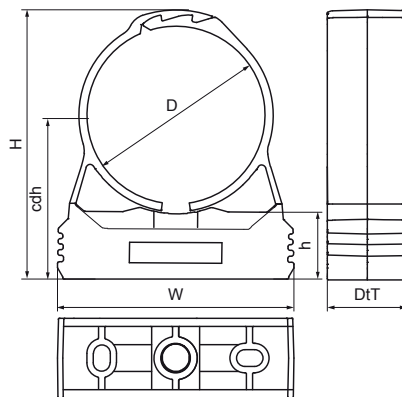

### Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe, use hands for full closing
- clamp can be mounted to wall, floor or ceiling by use of two bolts (outer slots) or by using a standard Walraven slide nut (middle hole) and screwing the clamp on a threaded rod
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C



| Productnumber    | Outside Pipe Diameter | Total Height | Total Width | Total Depth | Clamp Center Distance Height | Height | Connection Thread | Maximum Allowed Load Faz |
|------------------|-----------------------|--------------|-------------|-------------|------------------------------|--------|-------------------|--------------------------|
| Reference Letter | D                     | H            | W           | DtT         | cdh                          | h      | G                 | F <sub>0,z</sub>         |
| Unit description | mm                    | mm           | mm          | mm          | mm                           | mm     |                   | N                        |
| 08541075         | 71 - 76               | 122          | 105         | 39          | 75                           | 25.2   | None              | 650                      |
| 08541090         | 88 - 93               | 139          | 115         | 39          | 85                           | 24.5   | None              | 730                      |
| 08541110         | 109 - 115             | 173          | 145         | 39          | 105                          | 28.1   | None              | 1,200                    |