


Walraven Push-fit Saddle - Single (White)

(C1025)

for securing conduits and pipes to walls, floors, or ceilings

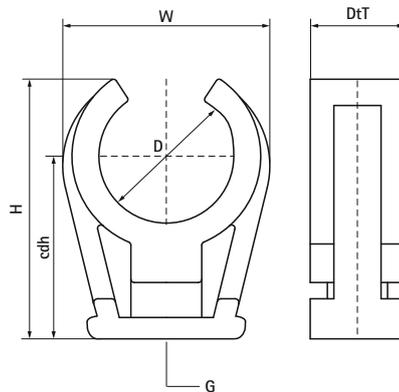

Features & benefits

- one-part saddle
- connection thread M6 made of brass
- material: PP (polypropylene), white (according to RAL 9016)
- fire class B2
- no corrosion, recyclable, halogen free, resistant to UV and ageing
- temperature resistance from approx. -30 °C to approx. +90 °C (constant); short to approx. +110 °C

| Product Number | Total Height | Total Width | Total Depth | Clamp Center Distance Height | Connection Thread |
|------------------|--------------|-------------|-------------|------------------------------|-------------------|
| Reference letter | H | W | DcT | cdh | G |
| Unit description | mm | mm | mm | mm | |
| 0853008 | 18 | 14 | 17 | 13 | M6 |
| 0853010 | 21 | 17 | 17 | 16 | M6 |
| 0853012 | 21 | 20 | 17 | 17 | M6 |
| 0853015 | 25 | 24 | 17 | 18 | M6 |
| 0853018 | 31 | 27 | 17 | 23 | M6 |
| 0853022 | 36 | 31 | 17 | 26 | M6 |
| 0853028 | 46 | 39 | 17 | 32 | M6 |
| 0853035 | 51 | 46 | 17 | 33 | M6 |
| 0853042 | 53 | 54 | 17 | 39 | M6 |
| 0853025 | 38 | 35 | 17 | 27 | M6 |
| 0853032 | 46 | 43 | 17 | 31 | M6 |