


## Walraven BISOFIX® PIR60

(D0390)

for insulated pipes

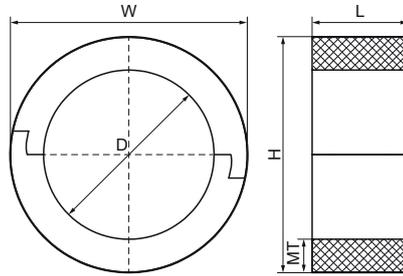

### Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for  $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for  $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity lambda (approx. value):  $0.30\text{ W/(mK)}$
- temperature range  $-45\text{ °C} - +105\text{ °C}$

Product Number	DN	Total Height	Total Width	Total Length	Material Thickness	Maximum Allowed Load Faz
Reference letter	D	H	W	L	MT	Fa,z
Unit description		mm	mm	mm	mm	N
I60000012		132	132	75	60.00	250
I60000016		136	136	75	60.00	270
I60000018	DN 10	138	138	75	60.00	310
I60000020		140	140	75	60.00	320
I60000022	DN 15	142	142	75	60.00	350
I60000025		145	145	75	60.00	370
I60000028	DN 20	148	148	75	60.00	380
I60000032		152	152	75	60.00	390
I60000035	DN 25	155	155	75	60.00	400
I60000040		160	160	75	60.00	420
I60000042	DN 32	162	162	75	60.00	500
I60000048	DN 40	168	168	75	60.00	530
I60000050		170	170	75	60.00	540
I60000054		174	174	75	60.00	580
I60000057		177	177	75	60.00	600
I60000060	DN 50	180	180	75	60.00	620
I60000064		184	184	75	60.00	640
I60000070		190	190	75	60.00	680
I60000076	DN 65	196	196	75	60.00	720
I60000089	DN 80	209	209	75	60.00	730
I60000102		222	222	75	60.00	760
I60000108		228	228	75	60.00	800
I60000114	DN 100	234	234	75	60.00	1,790
I60000133		253	253	100	60.00	2,190
I60000140	DN 125	260	260	100	60.00	2,280
I60000159		279	279	100	60.00	2,450
I60000168	DN 150	288	288	100	60.00	2,620