
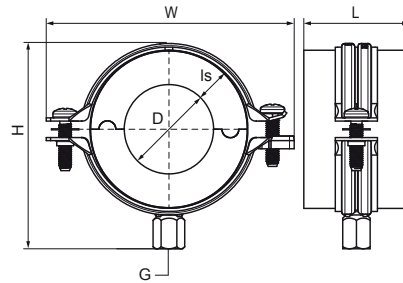


Walraven BISOFIX® E13 (M8/M10)

(D0505)

for insulated pipes



Features & benefits

- insulated pipe support with pipe clamp Walraven Bifix® G2
- clamp with quick locking system
- for fixing of thermal isolated pipe of steel, copper or stainless steel
- vapour proof glueing to pipe insulation
- when installing the pipe support, always align the contact areas of the insulation shells horizontally (to prevent tensile and pressure forces)
- with self-adhesive strip for easy closing of pipe support
- material: steel clamp; pipe support made of PIR foam (core), synthetic rubber (sides) and a vapour-proof layer of black PVC
- does not contain CFC, HCFC, formaldehyde or cadmium
- excellent thermal and mechanical properties
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- Walraven Bifix® G2 Clamp: surface protection: stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- working temperature from -45 °C to +105 °C

Productnumber	Outside Pipe Diameter	Pipe Diameter Imperial	DN	Connection Thread	Total Height	Total Width	Total Length	Insulation Thickness	Maximum Allowed Load F _{az}
Reference Letter	D	D	DN	G	H	W	L	Is	F _{az}
Unit description	mm	in			mm	mm	mm	mm	N
2210012	12			M8/M10	62	80	50	13.3	100
2210015	16			M8/M10	63	80	50	13.3	100
2210017	18	3/8	DN 10	M8/M10	70	91	50	13.3	100
2210021	22	1/2	DN 15	M8/M10	74	97	50	13.5	100
2210027	28	3/4	DN 20	M8/M10	81	97	50	13.3	100
2210035	35	1	DN 25	M8/M10	91	110	50	16.3	100
2210042	42	1 1/4	DN 32	M8/M10	98	118	50	16.3	150
2210054	54			M8/M10	112	134	50	13.3	225
2210060	60	2	DN 50	M8/M10	119	142	50	17.3	350
2210064	64			M8/M10	123	142	50	16.3	350
2210076	76	2 1/2	DN 65	M8/M10	136	155	50	17.2	575
2210089	89	3	DN 80	M8/M10	149	172	50	17.6	875
2210010	10			M8/M10	59	80	50	13	100
2210048	48	1 1/2	DN 40	M8/M10	103	125	50	16	225