
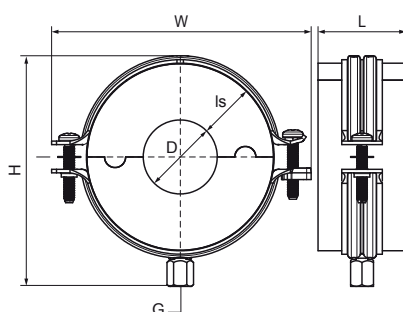


Walraven BISOFIX® E32 (M8/10)

(D0513)

for insulated pipes



Features & benefits

- insulated pipe support with pipe clamp Walraven Bifix® G2
- clamp with quick locking system
- for fixing of thermal isolated pipe of steel, copper or stainless steel
- vapour proof glueing to pipe insulation
- when installing the pipe support, always align the contact areas of the insulation shells horizontally (to prevent tensile and pressure forces)
- with self-adhesive strip for easy closing of pipe support
- material: steel clamp; pipe support made of PIR foam (core), synthetic rubber (sides) and a vapour-proof layer of black PVC
- does not contain CFC, HCFC, formaldehyde or cadmium
- excellent thermal and mechanical properties
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- Walraven Bifix® G2 Clamp: surface protection: stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- working temperature from -45 °C to +105 °C

Productnumber	Outside Pipe Diameter	Pipe Diameter Imperial	DN	Connection Thread	Total Height	Total Width	Total Length	Insulation Thickness	Maximum Allowed Load F _{0,z}
Reference Letter	D	D	DN	G	H	W	L	Is	F _{0,z}
Unit description	mm	in			mm	mm	mm	mm	N
22115012	12			M8/M10	98	118	50	31.7	100
22115015	16			M8/M10	102	125	50	32	100
22115018	18			M8/M10	102	125	50	30.2	100
22115022	22			M8/M10	111	134	50	32	100
22115028	28			M8/M10	123	142	50	35	100
22115035	35	1	DN 25	M8/M10	134	155	50	37	100
22115042	42	1 1/4	DN 32	M8/M10	131	148	50	32	150
22115054	54			M8/M10	143	164	50	32	225
22115060	60	2	DN 50	M8/M10	149	172	50	32.3	350
22115064	64			M8/M10	155	172	50	33	350
22115076	76	2 1/2	DN 65	M8/M10	168	189	50	33.7	575
22115089	89	3	DN 80	M8/M10	203	229	50	32.2	875
22115114	114	4	DN 100	M8/M10	209	229	50	33.7	1,250