


Walraven BISOFIX® E19 + Cold Block s1s2

(D05141)

for insulated pipes

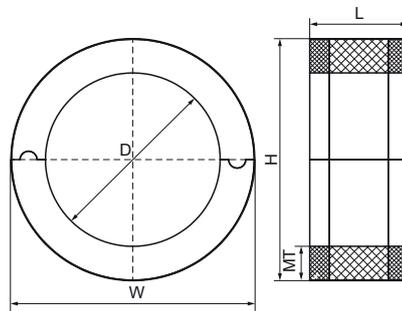

Features & benefits

- pipe clamp with insulation shell
- for fixing of thermal isolated pipe of steel, copper or stainless steel
- to combine with Bifix® G2 without lining and HD500 Clamps
- effective prevention of corrosion
- reduced smoke development in case of fire by intumescent sheet
- vapour proof glueing to pipe insulation
- when installing the pipe support, always align the contact areas of the insulation shells horizontally (to prevent tensile and pressure forces)
- with intumescent and self-adhesive INCERAM cladding for easy closure of the pipe support
- material: pipe support made of PIR foam (core), synthetic rubber (sides) and a vapour-proof layer of black PVC
- PIR density 80 / 120 kg / m³
- does not contain CFC, HCFC, formaldehyde or cadmium
- excellent thermal, mechanical and smoke reducing properties
- Storage and processing temperature ≥ +10 °C
- building material / Euro class according to DIN EN 13501-1 BL-s1, d0 or BL-s2, d0
- application temperature from -50 °C to + 110 °

Product Number	Total Height	Total Width	Total Length	Material Thickness	Maximum Allowed Load Faz
Reference letter	H	W	L	MT	Fa,z
Unit description	mm	mm	mm	mm	N
220200171	56	56	50	19.00	100
220200211	60	60	50	19.00	100
220200271	66	66	50	19.00	100
220200351	73	73	50	19.00	100
220200421	80	80	50	19.00	150
220200481	86	86	50	19.00	225
220200541	92	92	50	19.00	225
220200601	98	98	50	19.00	350
220200761	116	116	50	19.00	575
220200891	129	129	50	19.00	875
220201141	156	156	50	19.00	1,250
220201401	182	182	100	19.00	1,700
220201681	208	208	100	19.00	2,125
220202191	259	259	100	19.00	3,525