


Walraven BISOFIX® PIR20 (40mm)

(D0605)

for insulated pipes

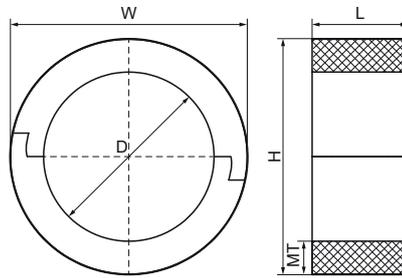

Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- temperature range $-45\text{ °C} - +105\text{ °C}$

Product Number	Total Height	Total Width	Total Length	Material Thickness	Maximum Allowed Load Faz
Reference letter	H	W	L	MT	Fa,z
Unit description	mm	mm	mm	mm	N
I240000015	55	55	20	20.00	160
I240000018	57	57	20	20.00	170
I240000022	61	61	20	20.00	180
I240000028	67	67	20	20.00	200
I240000034	73	73	20	20.00	220
I240000042	82	82	20	20.00	280
I240000048	88	88	20	20.00	300
I240000054	94	94	20	20.00	320
I240000057	97	97	20	20.00	330
I240000060	100	100	20	20.00	340
I240000064	104	104	20	20.00	350
I240000076	116	116	20	20.00	390
I240000089	129	129	20	20.00	430
I240000114	154	154	20	20.00	1,110