


Walraven BISOFIX® PIR30 (40mm)

(D0610)

for insulated pipes

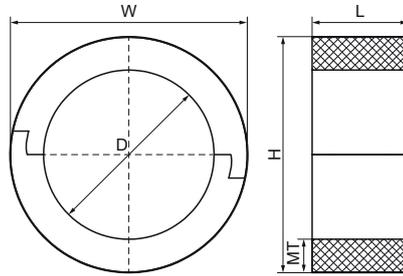

Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- temperature range $-45\text{ °C} - +105\text{ °C}$

Product Number	Total Height	Total Width	Total Length	Material Thickness	Maximum Allowed Load Faz
Reference letter	H	W	L	MT	Fa,z
Unit description	mm	mm	mm	mm	N
I34000015	75	75	30	30.00	160
I34000018	77	77	30	30.00	170
I34000022	81	81	30	30.00	180
I34000028	87	87	30	30.00	200
I34000034	93	93	30	30.00	220
I34000042	102	102	30	30.00	280
I34000048	108	108	30	30.00	300
I34000054	114	114	30	30.00	320
I34000060	120	120	30	30.00	340
I34000064	124	124	30	30.00	350
I34000076	136	136	30	30.00	390
I34000089	149	149	30	30.00	430
I34000114	174	174	30	30.00	1,110