


Walraven BISOFIX® PIR40 (40mm)

(D0615)

for insulated pipes

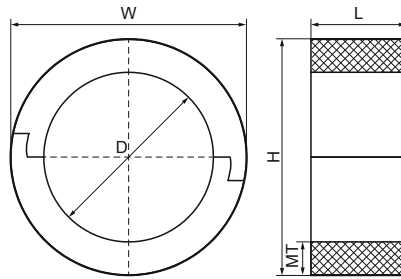

Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm}$ = 80kg/m^3
- PIR density for $D > 110\text{mm}$ = 120kg/m^3
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- temperature range $-45\text{ °C} - +105\text{ °C}$

Productnumber	Outside Pipe Diameter	Total Height	Total Width	Total Length	Material Thickness	Operating Temperature	Maximum Allowed Load Faz
Reference Letter	D	H	W	L	MT		Fa,z
Unit description	mm	mm	mm	mm	mm	°C	N
I440000042	42.4	122	122	40	40.00	-45 - 105	410
I440000048	48.3	128	128	40	40.00	-45 - 105	430
I440000060	60.3	140	140	40	40.00	-45 - 105	470
I440000076	76.1	156	156	40	40.00	-45 - 105	530
I440000089	88.9	169	169	40	40.00	-45 - 105	620