


## Walraven BISOFIX® PIR40 (40mm)

(D0615)

for insulated pipes

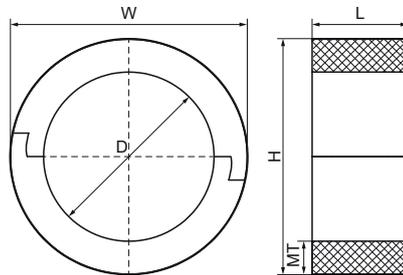

### Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for  $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for  $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity lambda (approx. value):  $0.30\text{ W/(mK)}$
- temperature range  $-45\text{ °C} - +105\text{ °C}$

| Product Number   | Total Height | Total Width | Total Length | Material Thickness | Maximum Allowed Load Faz |
|------------------|--------------|-------------|--------------|--------------------|--------------------------|
| Reference letter | H            | W           | L            | MT                 | Fa,z                     |
| Unit description | mm           | mm          | mm           | mm                 | N                        |
| I440000022       | 101          | 101         | 40           | 40.00              | 350                      |
| I440000028       | 107          | 107         | 40           | 40.00              | 350                      |
| I440000034       | 113          | 113         | 40           | 40.00              | 370                      |
| I440000042       | 122          | 122         | 40           | 40.00              | 410                      |
| I440000048       | 128          | 128         | 40           | 40.00              | 430                      |
| I440000054       | 134          | 134         | 40           | 40.00              | 440                      |
| I440000060       | 140          | 140         | 40           | 40.00              | 470                      |
| I440000070       | 150          | 150         | 40           | 40.00              | 510                      |
| I440000076       | 156          | 156         | 40           | 40.00              | 530                      |
| I440000089       | 169          | 169         | 40           | 40.00              | 620                      |