


Walraven BISOFIX® PIR50 (40mm)

(D0620)

for insulated pipes

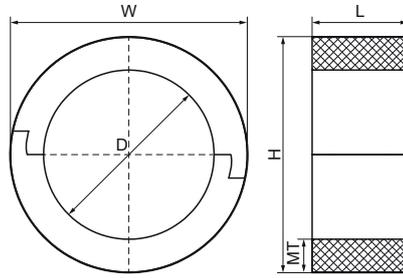

Features & benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm}$ = 80kg/m^3
- PIR density for $D > 110\text{mm}$ = 120kg/m^3
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- temperature range $-45\text{ °C} - +105\text{ °C}$

Product Number	Total Height	Total Width	Total Length	Material Thickness	Maximum Allowed Load Faz
Reference letter	H	W	L	MT	Fa,z
Unit description	mm	mm	mm	mm	N
I540000034	133	133	50	50.00	370
I540000042	142	142	50	50.00	470
I540000048	148	148	50	50.00	500
I540000054	154	154	50	50.00	520
I540000060	160	160	50	50.00	540
I540000064	164	164	50	50.00	550
I540000076	176	176	50	50.00	650
I540000089	189	189	50	50.00	690