


## Walraven BISOFIX® CF Cold FixPoint Clamp

(E0503)

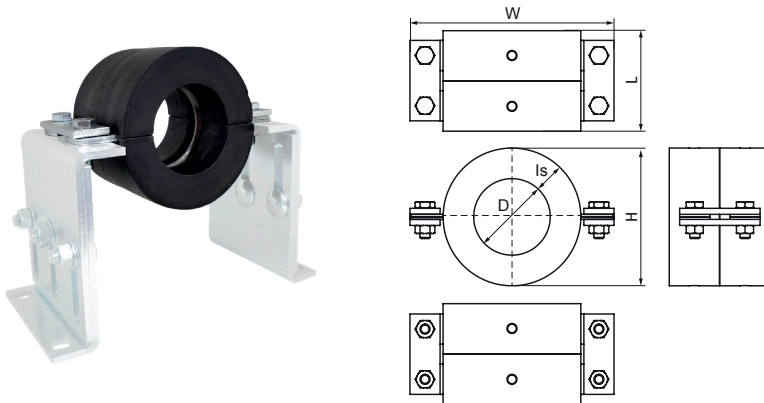

### Features & benefits

- insulated cold clamps made of pressure-resistant Polyurethane foam
- integral foam inner recess for mounting of the pressure flange
- outer link plates (galvanized) for connection to two piece set by crossbars
- high axial force absorption by the site welded to the pipe pressure flange
- durable materials ensure a long-term and reliable operation security
- PUR foam density ca. 250 kg/m<sup>3</sup>
- flammability class B2 (DIN 4102)
- K value 0.042 W/mK at 0 °C

| Productnumber    | Outside Pipe Diameter | Connection Thread | Total Height | Total Width | Total Length | Insulation Thickness | Maximum Allowed Load Faz | Maximum Allowed Load Fay |
|------------------|-----------------------|-------------------|--------------|-------------|--------------|----------------------|--------------------------|--------------------------|
| Reference Letter | D                     | G                 | H            | W           | L            | Is                   | F <sub>a,z</sub>         | F <sub>a,y</sub>         |
| Unit description | mm                    |                   | mm           | mm          | mm           | mm                   | N                        | N                        |
| 0881076          | 76.1                  | None              | 137          | 203         | 100          | 30                   | 3,600                    | 2,500                    |
| 0881088          | 88.9                  | None              | 150          | 211         | 100          | 30                   | 4,300                    | 3,000                    |
| 0881114          | 114.3                 | None              | 193          | 274         | 110          | 40                   | 6,900                    | 4,000                    |
| 0881133          | 133                   | None              | 214          | 300         | 120          | 40                   | 7,700                    | 4,500                    |
| 0881139          | 139.7                 | None              | 217          | 300         | 120          | 40                   | 8,100                    | 4,500                    |
| 0881159          | 159                   | None              | 239          | 319         | 120          | 40                   | 9,200                    | 6,000                    |
| 0881168          | 168.3                 | None              | 253          | 328         | 120          | 40                   | 9,700                    | 6,000                    |
| 0881219          | 219.1                 | None              | 340          | 439         | 200          | 60                   | 23,000                   | 9,000                    |
| 0881273          | 273                   | None              | 393          | 493         | 200          | 60                   | 28,000                   | 12,000                   |
| 2210000          |                       | None              | 50           | 50          | 230          |                      |                          |                          |