


Walraven Cu-FiX Fixing Point for Copper Pipe

(E0565)

for copper pipes

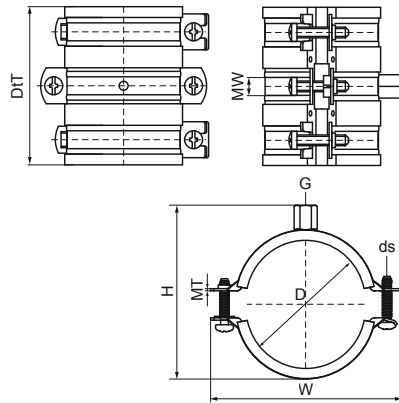

Features & benefits

- to make noise insulating fixpoint for a copper pipe
- temperature resistance up to +120 °C
- noise insulating lining, EPDM rubber, reddish brown
- sound insulating lining according DIN 4109
- consists of: 2 Clamps BISMAT® 2000 (fixing), 1 Clamp 2S (guiding)
- material: steel
- zinc plated

Productnumber	Outside Pipe Diameter	DN	Connection Thread	Total Height	Total Width	Total Depth	Material Thickness	Material Width	Screw Size	Maximum Allowed Load Faz
Reference Letter	D	DN	G	H	W	DtT	MT	MW	ds	Fa,z
Unit description	mm			mm	mm	mm	mm	mm		N
3368015	15	-	M8/M10	34	55	85	1.00	20	M5	1,110
3368018	18	DN 15	M8/M10	37	58	85	1.00	20	M5	1,110
3368028	28	DN 25	M8/M10	47	68	85	1.00	20	M5	1,110
3368035	35	DN 32	M8/M10	55	75	85	1.00	20	M5	1,110
3368042	42	DN 40	M8/M10	62	83	85	1.25	20	M5	1,240
3368054	54	DN 50	M8/M10	71	92	85	1.25	20	M5	1,240