


## Walraven Rubberfoot Support System (Aluminium Channel 40x21)

(E2015)

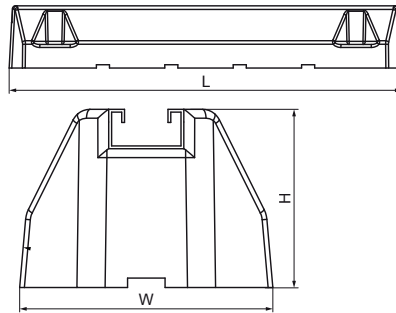

### Features & benefits

- for supporting small pipework systems, ductwork runs, cable trays and heat pumps
- to support climate installations, walkways on flat roofs, etc.
- does not penetrate the waterproof membrane (at PVC roofs a separating layer must be installed to protect against plasticizer migration - see Walraven BIS Yeti® Triplex Separation Layer)
- material: vulcanized rubber, black; Rail 40x21mm made from aluminium
- For a detailed calculation and for support how to spread the load please contact Walraven Technical Support.
- In cases where a foot is used in roof applications, the installer is obliged to verify maximum load capacity of roof before installation.

| Productnumber    | Total Width | Total Length | Total Height |
|------------------|-------------|--------------|--------------|
| Reference Letter | W           | L            | H            |
| Unit description | mm          | mm           | mm           |
| BX67687000       | 135         | 1,000        | 95           |
| BX67687250       | 190         | 240          | 95           |
| BX67687400       | 135         | 400          | 95           |
| BX67687600       | 135         | 600          | 95           |