


Walraven Rubberfoot Support System (Aluminium Channel 40x21)

(E2015)

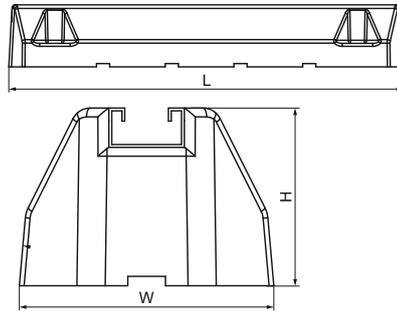

Features & benefits

- for supporting small pipework systems, ductwork runs and cable trays
- to support climate installations, walkways on flat roofs, etc.
- does not penetrate the waterproof membrane (at PVC roofs a separating layer must be installed to protect against plasticizer migration - see Walraven BIS Yeti® Triplex Separation Layer)
- material: vulcanized rubber, black; Rail 40x21mm made from aluminium
- For a detailed calculation and for support how to spread the load please contact Walraven Technical Support.
- In cases where a foot is used in roof applications, the installer is obliged to verify maximum load capacity of roof before installation.

Product Number	Total Width	Total Length	Total Height
Reference letter	<i>W</i>	<i>L</i>	<i>H</i>
Unit description	<i>mm</i>	<i>mm</i>	<i>mm</i>
BX67687000	135	1,000	95
BX67687250	190	240	95
BX67687400	135	400	95
BX67687600	135	600	95