


## Walraven RapidRail® Cantilever Arm

(G1007)

fixing to wall, floor or ceiling

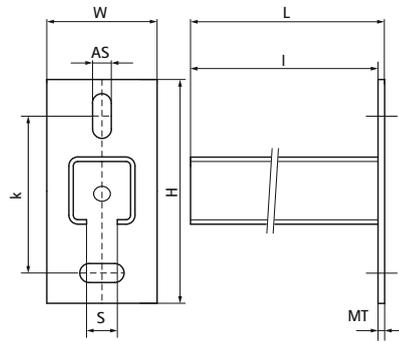

### Features & benefits

- base plate with welded C-profile
- for quick and adjustable fixing of one or multiple pipes
- CO<sub>2</sub> welded
- with continuous perforation
- with sawing marks each 50 mm
- unique hole pattern at type 30x20 allows to click in Walraven RapidRail® Hammerfix from both sides
- material: base plate made of steel 1.0332 (DD11)
- material: profiles type 27x18 and 30x20 made of steel 1.0330 (DC01)
- material: profiles type 30x15 and 30x30 made of steel 1.0038 (S235JR)
- zinc plated
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet "Technical Details Walraven RapidRail®"



Product Number	Type	Length	Total Height	Total Width	Total Length	Material Thickness	Anchoring Slot	Profile Opening	Heart To Heart Distance
Reference letter		<i>l</i>	<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>AS</i>	<i>S</i>	<i>k</i>
Unit description		mm	mm	mm	mm	mm	mm	mm	mm
66036805	38x40	1,050	130	48	1,050	5.00	25x11	15	90
66036820	38x40	200	130	48	200	5.00	25x11	15	90
66036825	38x40	250	130	48	250	5.00	25x11	15	90
66036835	38x40	350	130	48	350	5.00	25x11	15	90
66036840	38x40	400	130	48	400	5.00	25x11	15	90
66036850	38x40	500	130	48	500	5.00	25x11	15	90
66036860	38x40	600	130	48	600	5.00	25x11	15	90
66036875	38x40	750	130	48	750	5.00	25x11	15	90
66031815	27x18	150	110	38	154	4.00	16x11	15	70
66031820	27x18	200	110	38	204	4.00	16x11	15	70
66031830	27x18	300	110	38	304	4.00	16x11	15	70
66031850	27x18	500	110	38	504	4.00	16x11	15	70
66031520	30x15	200	110	38	204	4.00	16x11	15	70
66031530	30x15	300	110	38	304	4.00	16x11	15	70
66032015	30x20	150	110	38	154	4.00	16x11	15	70
66032020	30x20	200	110	38	204	4.00	16x11	15	70
66032025	30x20	250	110	38	254	4.00	16x11	15	70
66033020	30x30	200	110	48	205	5.00	18x11	15	70
66033025	30x30	250	110	48	255	5.00	18x11	15	70
66033030	30x30	300	110	48	305	5.00	18x11	15	70
66033040	30x30	400	110	48	405	5.00	18x11	15	70
66033050	30x30	500	110	48	505	5.00	18x11	15	70