


Walraven RapidStrut® channel Double (BUP)

(H0409)

double profile for adapting on both sides of the channel

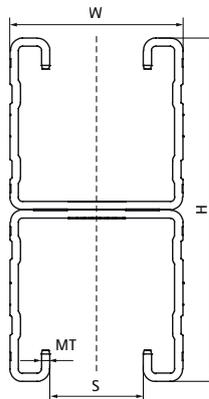

Features & benefits

- universal channel system
- double sided back on back channel with continuous perforation
- inward formed flanges with serrated profile for extra grip
- with sawing marks each 50 mm on both sides
- material: steel 1.0242 (S250GD)
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- version 62|H Double tested for fire safety
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



| Product Number | Type | Total Height | Total Width | Total Length | Material Thickness | Profile Opening |
|------------------|-----------------|--------------|-------------|--------------|--------------------|-----------------|
| Reference letter | | H | W | L | MT | S |
| Unit description | | mm | mm | mm | mm | mm |
| 65018626 | 21 M - Double | 42 | 41 | 6,000 | 2.00 | 22 |
| 65018646 | 41 M - Double | 82 | 41 | 6,000 | 2.00 | 22 |
| 65018666 | 62 H - Double | 124 | 41 | 6,000 | 2.50 | 22 |
| 65018466 | 62 H - Double | 124 | 41 | 4,000 | 2.50 | 22 |