


Walraven RapidStrut® channel (3.0 / pg)

(H0412)

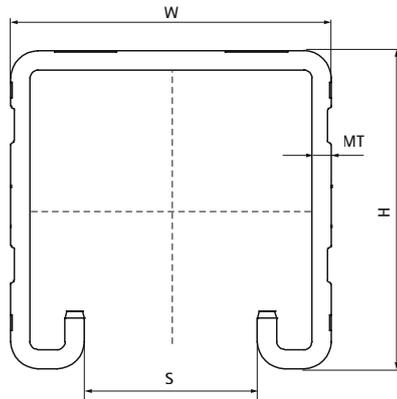

Features & benefits

- universal channel system
- with continuous perforation
- distance between channel end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- material: steel 1.0242
- suitable for use with Promat constructions 476 / 477 / 478
- For more information about the max. allowed load please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'.



Product Number	Type	Total Height	Total Width	Total Length	Material Thickness	Profile Opening
<i>Reference letter</i>		<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>S</i>
<i>Unit description</i>		<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
65053453	41x41x3,0	41	41	3,000	3.00	22
65056453	41x41x3,0	41	41	6,000	3.00	22
65056653	41x41x3,0	62	41	6,000	3.00	22