


Walraven RapidStrut® Cantilever Arm 21|H Vertical (BUP1000)

(H0807)

special profile for shaft installation

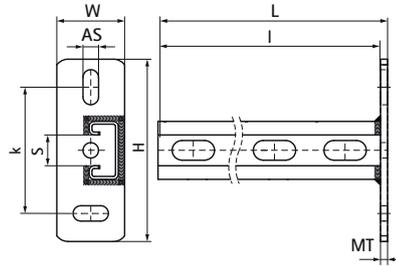

Features & benefits

- vertical welded cantilever arm for vertical pipe installations
- perfect solution for shaft situations with or without wall
- optimal utilization of the available space in shafts
- CO₂ welded
- inward formed flanges with serrated profile for extra grip
- material: steel 1.0226
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

| Product Number | Type | Length | Total Height | Total Width | Total Length | Material Thickness | Anchoring Slot | Profile Opening | Heart To Heart Distance |
|-------------------------|-----------|-----------|--------------|-------------|--------------|--------------------|----------------|-----------------|-------------------------|
| <i>Reference letter</i> | | <i>l</i> | <i>H</i> | <i>W</i> | <i>L</i> | <i>MT</i> | <i>AS</i> | <i>S</i> | <i>k</i> |
| <i>Unit description</i> | | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> |
| 6603828 | 41x21x2,5 | 300 | 130 | 48 | 305 | 5,00 | 25x11 | 22 | 90 |
| 6603829 | 41x21x2,5 | 600 | 130 | 48 | 605 | 5,00 | 25x11 | 22 | 90 |