Walraven RapidStrut® Cantilever Arm 41x41D (BUP1000) *(H0810)*

double profile for adapting on both sides of the cantilever

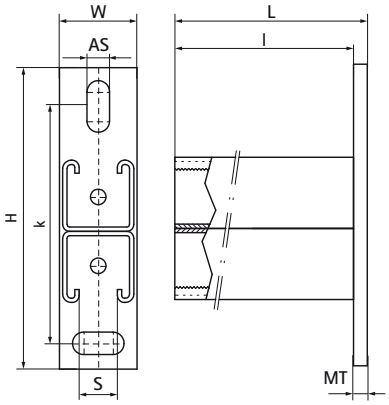

Features & benefits

- base plate with welded Double RapidStrut® Profile
- slots at 90° to each other to simplify fixing
- CO_2 welded
- inward formed flanges with serrated profile for extra grip
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- tested for fire safety.
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'

Product Number	Type	Length	Total Height	Total Width	Total Length	Material Thickness	Anchoring Slot	Profile Opening	Heart To Heart Distance
Reference letter		*l*	*H*	*W*	*L*	*MT*	*AS*	*S*	*k*
Unit description		*mm*	*mm*	*mm*	*mm*	*mm*	*mm*	*mm*	*mm*
66088240	41 | M - Double	400	177.5	50	410	10.00	20x13	22	135
66088260	41 | M - Double	600	177.5	50	610	10.00	20x13	22	135
66088280	41 | M - Double	800	177.5	50	810	10.00	20x13	22	135
66088298	41 | M - Double	1,000	177.5	50	1,010	10.00	20x13	22	135