


Walraven Maxx Cross Connector CC82

(H20553)

prefabbed Cross Connector

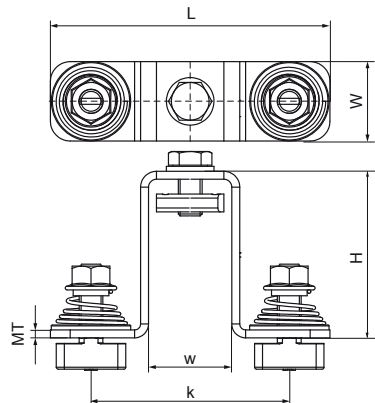

Features & benefits

- to connect Walraven RapidStrut® 82|H profiles to Walraven Maxx Profiles
- user friendly by rounded edges
- ready to use including pre-assembled fasteners to save installation time
- all pre-assembled fasteners in M12 for stable connections
- material: T-Bolt connectors M12 made from steel class 8.8, to be tightened with 75Nm
- material: Cross Connector: steel 1.0242 (S250GD) + ZM310 MAC
- surface protection:
- product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- surface treatment: T-Bolt Connectors: hot dip galvanized

Productnumber	For Rail Type	Model	Width	Material Thickness	Heart To Heart Distance	Torque Moment For Installation	Maximum Allowed Load Faz	Maximum Allowed Load Fax
Reference Letter			w	MT	k	T _{inst}	F _{0,z}	F _{0,x}
Unit description			mm	mm	mm	Nm	N	N
6589117	80x80, 100x100, 100x120, 100x150	Cross connector	42	4.00	100	75	3,600	2,400