
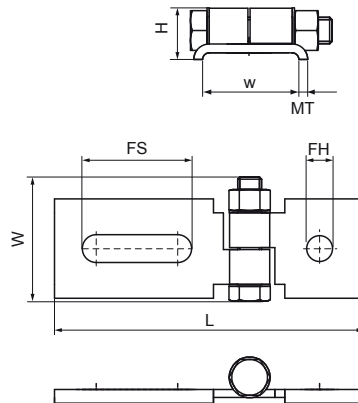


Walraven RapidStrut® Connector, Hinged (BUP1000)

(H2840)

for flexible angle connections



Features & benefits

- to make fabrication with Walraven RapidStrut® Rail
- fully adjustable
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Productnumber	For Rail Type	Model	Width	Material Thickness	Maximum Allowed Load Faz
Reference Letter			w	MT	F _{0,z}
Unit description			mm	mm	N
66581821	41x21, 41x41, 41x51, 41x62, 41x82	Support angle	42	4.00	1,000
66581822	41x21, 41x41, 41x51, 41x62, 41x82	Support angle	42	4.00	1,000
66581823	41x21, 41x41, 41x51, 41x62, 41x82	Support angle	42	4.00	1,000