


## Walraven RapidStrut® Inter Flange Clamp

(H3650)

to connect Strut rails inside of steel beam flanges

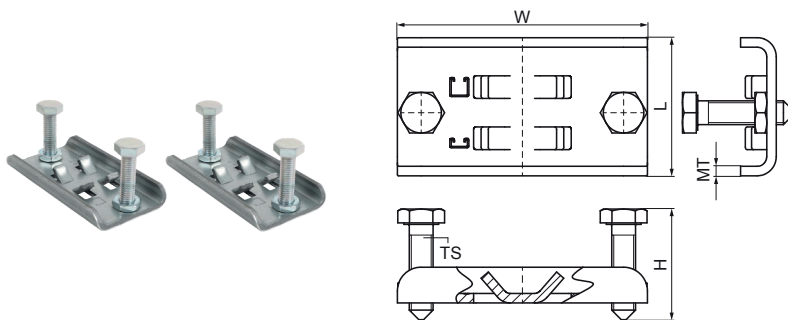

### Features & benefits

- set of two clamping plates, to be installed in combination with Walraven RapidStrut® Rail
- for connecting installation between the flanges of I- or U-profile steelwork without drilling or welding
- material: clamp made of steel 1.0242 (S250GD); hexagon head bolts M10x40 with tip: steel class 8.8 (EN-ISO 898-1); hexagon thin nuts M10 DIN 439-B: steel class 04 (EM-ISO 898-2)
- clamp: ZM310-MAC (pre-galvanized); fasteners: zinc plated ISO 2081-Fe/Zn5/A (EN ISO 2081:2008)

| Productnumber    | For Rail Type | Total Height | Total Width | Total Length | Thread Size | Material Thickness | Maximum Allowed Load Faz |
|------------------|---------------|--------------|-------------|--------------|-------------|--------------------|--------------------------|
| Reference Letter |               | H            | W           | L            | TS          | MT                 | F <sub>0,z</sub>         |
| Unit description |               | mm           | mm          | mm           |             | mm                 | N                        |
| 6078031          | 41x21         | 40           | 105         | 58           | M10         | 4.00               | 2,100                    |