


Walraven Yeti® A1000 Set for PV inverter 1000x1136

(10425)

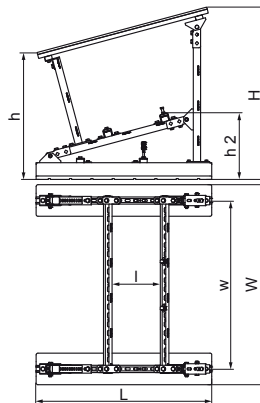

Features & benefits

- fully pre-assembled substructure including vibration damping bases, channels, accessories, and trapezoidal sheet metal roof
- for easy inverter installation, the protective roof can be loosened on one side and folded open; maintenance can be carried out from the rear
- cable routing via two rails with a usable length of up to 90 cm and three flexibly positionable Bifix® G2 pipe clamps (Ø 25–28 mm)
- fast installation without penetrating the roof membrane or roof waterproofing (for PVC roofs, a separation layer must be installed to prevent plasticizer migration – see Walraven Yeti® Triplex separation layer)
- Module weight: 70 kg; product gets delivered fully assembled on a pallet
- sound insulation in accordance with DIN EN ISO 10140-1 and DIN EN ISO 10140-3 with insertion loss of up to 33 dB(A)
- UV resistance certified according to EN ISO 16474-3:2014-02 by ITB
- Material of damping bases: vulcanized rubber, black; channel made of steel grade 1.0242
- all steel parts are part of Walraven UltraProtect® 1000 system, stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Productnumber	Total Height	Total Width	Total Length	Height	Height 2	Length	Width	Maximum Allowed Load Faz
Reference Letter	H	W	L	h	h 2	l	w	F _{0,z}
Unit description	mm	mm	mm	mm	mm	mm	mm	N
67685542	936	1,120	1,000	719	375	350	979	1,962