


Walraven Yeti® Type A Rubberfoot Kits Support System (BUP1000)

(I0471)

for Rooftop Installations

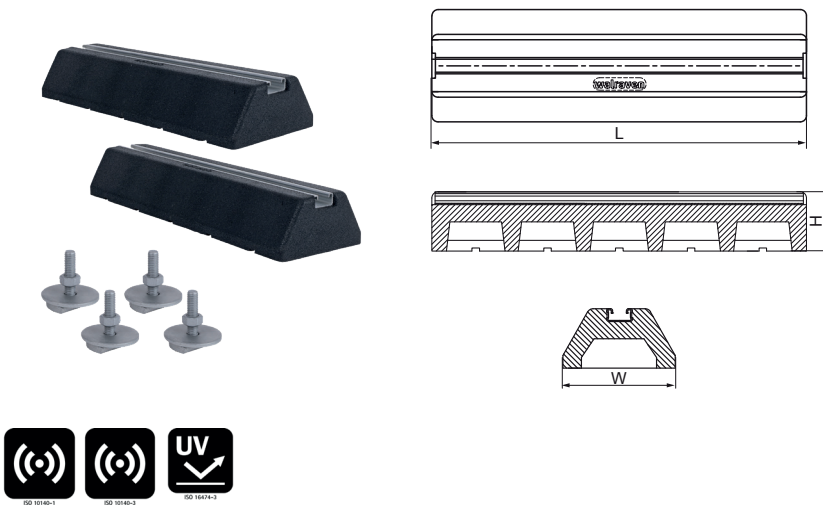

Features & benefits

- assembled Kit ready to install to support small units like climate unit, heat pumps etc.
- kit contains 2 pieces of Yeti® rubberfoot Type A and 4 pieces of T-bolt assembly M8x40mm
- does not penetrate the waterproof membrane (at PVC roofs a separating layer must be installed to protect against plasticizer migration - see Walraven BIS Yeti® Triplex Separation Layer)
- material: vulcanized rubber 100% recycled material, black; strut channel 41x21mm made of steel 1.0242
- noise reduction according to DIN EN ISO 10140-1 and DIN EN ISO 10140-3 up to 33 dB(A)
- UV resistant according to EN ISO 16474-3:2014-02 certified by ITB
- Strut Channel and t-bolt assembly surface protection: product is part of the Walraven BIS UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- For a detailed calculation and for support how to spread the load please contact Walraven Technical Support.
- In cases where a foot is used in roof applications, the installer is obliged to verify maximum load capacity of roof before installation.
- $F_{a,z}$ = max. allowed load per 1 foot

Productnumber	Total Width	Total Length	Total Height
Reference Letter	W	L	H
Unit description	mm	mm	mm
67688401	180	400	95
67688601	180	600	95
67688001	180	1,000	95