


Walraven Beam Clamp Model C (BUP1000)

(K2003)

for clamping on beam flange

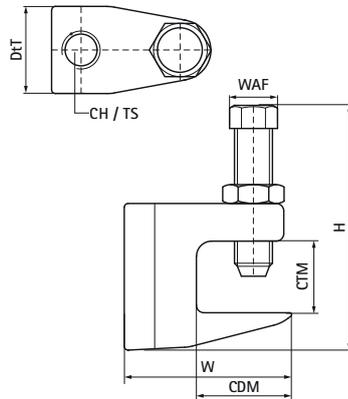

Features & benefits

- for a solid fixing to steel construction without the need for welding or drilling
- according to VdS-regulations an additional safety strap should be used when supporting pipes above DN65
- bolt with hexagon head according to DIN 933 strength class 8.8, screw point with cup ring according to EN ISO 4753 and lock nut
- product is part of the Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- FM approval and UL listed for hanger rod size M10



| Product Number | Maximum Clamping Thickness | Maximum Clamping Depth | Total Height | Total Width | Total Depth | Connection Hole | Thread Size | Width Across Flats | Maximum Allowed Load Faz | Approvals |
|-------------------------|----------------------------|------------------------|--------------|-------------|-------------|-----------------|-------------|--------------------|--------------------------|------------------------|
| <i>Reference letter</i> | <i>CTM</i> | <i>CDM</i> | <i>H</i> | <i>W</i> | <i>DtT</i> | <i>CH</i> | <i>TS</i> | <i>WAF</i> | <i>F_{a,z}</i> | |
| <i>Unit description</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | | <i>mm</i> | <i>N</i> | |
| 6008008 | 23 | 20 | 62 | 50 | 21 | | M8 | 17 | 2,500 | VdS, ITB (KOT) |
| 6008010 | 20 | 20 | 62 | 44 | 21 | | M10 | 17 | 2,500 | VdS, FM, UL, ITB (KOT) |
| 6008910 | 20 | 20 | 62 | 44 | 21 | 11 | | 17 | 2,500 | VdS, FM, UL, ITB (KOT) |