


Walraven WDI1R Drop-in Anchor Short

(L0320)

reduced length drop-in anchor with a lip collar

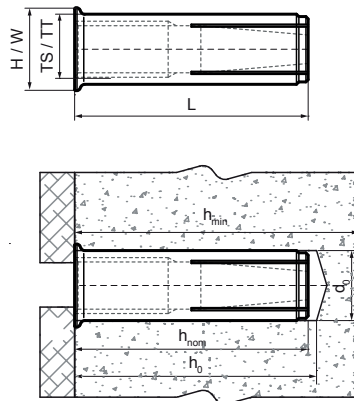

Features & benefits

- simple and quick installation procedure
- collar with a lip for flush anchor setting at any hole depth
- medium load capacity
- ETA ETAG001 Part 6 approval for multiple use for non-structural applications
- fire resistance class R30-R120 for design of anchorages under exposure to fire
- complies with VdS CEA 4001.2024-01 (08) for applications with sprinkler systems in concrete (M8-M12)
- substrate type: cracked concrete, non-cracked concrete
- reduced 25 mm anchor length allows approved applications in precast prestressed hollow core slabs
- for loads and more information, refer to the product data sheet and/or the ETA report
- material: steel
- zinc plated

Productnumber	Thread Size	Thread Type	Total Height	Total Width	Total Length	Drill Hole Diameter	Min. Drill Hole Depth	Standard Embedment Depth	Minimum Substrate Thickness
Reference Letter	TS	TT	H	W	L	d0	h0 min	hnom	hmin
Unit description			mm	mm	mm	mm	mm	mm	mm
6103208	M8	Metric	10	10	25	10	25	≥ 25	80
6103210	M10	Metric	12	12	25	12	25	≥ 25	80
6103206	M6	Metric	8	8	25	8	25	≥ 25	80
6103212	M12	Metric	14	14	25	15	25	≥ 25	80