


Walraven WDI2R Drop-in Anchor

(L0321)

reduced length drop-in anchor with a lip collar

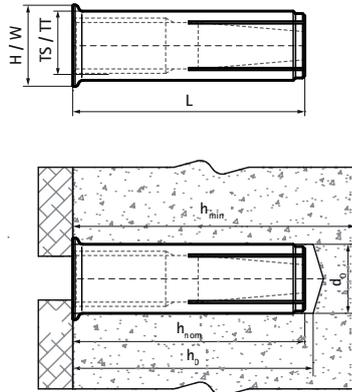

Features & benefits

- European Technical Assessment according to EAD 330747-00-0601 (May 2018) for fasteners for use in concrete for redundant non-structural systems.
- increased productivity – the reduced 25mm anchor length minimizes drilling depth and speeds up installation
- approved applications in precast prestressed hollow core slabs
- fire resistance class R30-R120 for design of anchorages under exposure to fire
- complies with VdS CEA 4001: 2024-01 (08) for applications with sprinkler systems in concrete elements
- substrate type: cracked concrete, non-cracked concrete
- for loads and more information, refer to the product data sheet and/or the ETA report
- material: steel
- zinc plated

Product Number	Thread Size	Thread Type	Total Height	Total Width	Total Length	Drill Hole Diameter	Min. Drill Hole Depth	Standard Embedment Depth	Minimum Substrate Thickness
<i>Reference letter</i>	<i>TS</i>	<i>TT</i>	<i>H</i>	<i>W</i>	<i>L</i>	<i>d0</i>	<i>h0 min</i>	<i>hnom</i>	<i>hmin</i>
<i>Unit description</i>			<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
6103310825	M8	Metric	11	11	25	10	28	≥ 25	80
6103311025	M10	Metric	13	13	25	12	28	≥ 25	80
6103311225	M12	Metric	16	16	25	15	29	≥ 25	80