


## Walraven W-LX-N Concrete Screw

(L0359)

unibody zinc-plated concrete screw with an internal M8/M10 thread

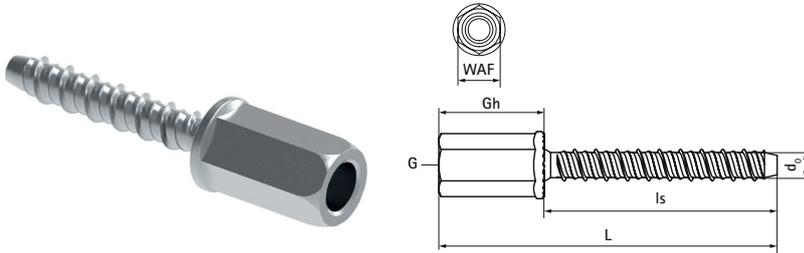

### Features & benefits

- very high load capacity
- approved for use in precast prestressed hollow core slabs
- up to 3 anchoring depths provide maximum installation flexibility
- reduced edge and anchor spacing distances
- removable
- unique tip and thread geometry prevents concrete spalling
- fire resistance class R30-R120 for design of anchorages under exposure to fire
- complies with VdS CEA 4001:2024-01 (08) for applications with sprinkler systems in concrete elements
- substrate type: cracked concrete, non-cracked concrete, precast pre-stressed hollow core slabs
- for loads and more information, refer to the product data sheet and/or the ETA report
- material: steel
- zinc plated

| Product Number   | Connection Thread | Connection Height | Screw Length | Anchor Size | Width Across Flats | Drill Hole Diameter | Total Height | Total Width | Total Length |
|------------------|-------------------|-------------------|--------------|-------------|--------------------|---------------------|--------------|-------------|--------------|
| Reference letter | G                 | Gh                | Is           |             | WAF                | d0                  | H            | W           | L            |
| Unit description |                   | mm                | mm           |             | mm                 | mm                  | mm           | mm          | mm           |
| 62433304         | M8/M10            | 25                | 35           | 6           | 13                 | 6                   | 16           | 16          | 60           |
| 62433305         | M8/M10            | 25                | 55           | 6           | 13                 | 6                   | 16           | 16          | 80           |
| 62433314         | M8                | 15                | 35           | 6           | 13                 | 6                   | 16           | 16          | 50           |
| 62433324         | M10               | 15                | 35           | 6           | 13                 | 6                   | 16           | 16          | 50           |
| 62433315         | M8                | 15                | 55           | 6           | 13                 | 6                   | 16           | 16          | 70           |
| 62433325         | M10               | 15                | 55           | 6           | 13                 | 6                   | 16           | 16          | 70           |